


Rotator 360° endless, foundry version T351G

1 hydraulic function

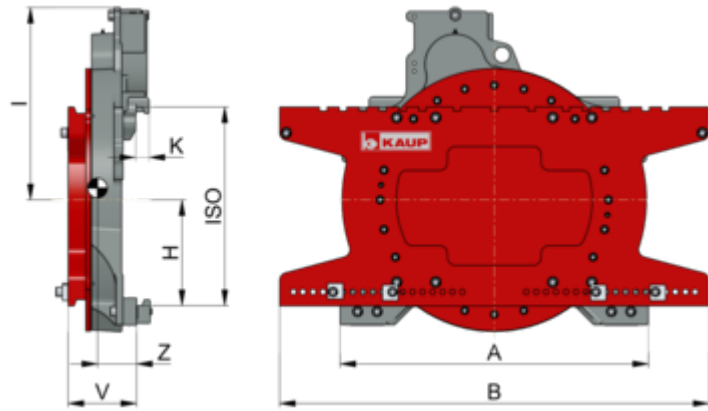

Specification:

The KAUP Rotator 360° endless T351 is also available in a foundry implementation. This attachment is adapted to the demands of this operational area with a closed fork carriage plate and a closed base plate as well as heat-resistant covered hydraulic tubes. Otherwise this rotator resembles the T351.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is serially manufactured in foundry version. It is designed for operation in applications with extremely high temperatures. Further Information are displayed in a glossary in the info-center.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sidesift upon request.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires one additional hydraulic function.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



Rotator 360° endless, foundry version T351G

Technical specifications

Model													
1T351.2G	1.800	500	817	890	203	288	33	2	6.013	7,6	207	124	250
2T351.1G	2.500	500	790	1.040	269	515	29	2	7.700	9,7	174	93	302
2T351.1G	2.500	500	790	1.150	269	515	29	2	7.700	9,7	174	95	310
2,5T351.1G	3.200	500	790	1.100	269	515	33	3	7.700	9,7	179	106	387
3,5T351.1G	4.000	500	880	1.100	381	539	36	3	11.815	13,8	202	113	525
4T351.1G	5.000	500	900	1.100	378	595	36	3	14.823	17,4	221	120	575
4,5T351.1G	5.000	500	900	1.350	328	695	40	4	14.823	17,4	231	129	670
5T351.2G	6.000	600	1.080	1.350	351	460	40	4	13.434	15,7	275	167	725
6T351.2G	6.500	600	1.260	1.350	351	460	40	4	17.157	20,7	275	155	842
8T351.2G	8.000	900	1.300	1.600	396	480	40	4	21.679	18,8	304	175	1.080



Qualities:

- Foundry implementation
- Good residual capacity
- Rotation 360° endlessly
- Robust construction with gear drive
- Original forks usable
- Lateral supporting fork and load stabilizers optionally



- Rotators with higher rotating speeds available upon request
- Other fork carriage widths available upon request.
- Removable lateral supporting fork 800 mm available against add-on price
- Removable and foldable lateral supporting fork 800 mm available against add-on price
- Rotators up to 40 T upon request.
- Matching forks for KAUP-Rotators on request.
- When forks are used in combination with a Rotator extremely high strain is applied to the lower fork angle when rotating a load which in turn strains the lower brackets.
- For this type of operation KAUP recommends forks with strengthened lower brackets. Strengthened lower brackets can be ordered for all ISO forks model T180.

Product Images

