


# Telescopic Appliance Clamp T413GT

with independent sideshift - rubber coated arms - both arms fix - 2 hydraulic functions

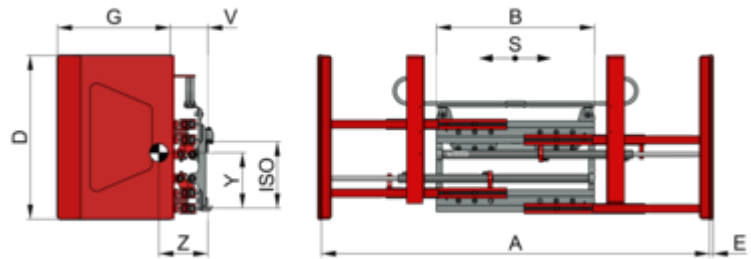

## Specification:

The KAUP Telescopic Appliance Clamp T413GT is used where white and brown product as well as other wide loading property is used. The slender clamp arms predestine this attachment for the truck and container loading.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g.  $\pm 100$  mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is available with Smart Load Control (SLC), an autonomous system for controlling the clamp force. The required pressures are always adjusted autonomously depending on the load.



Attachment can be fitted with different types of contact pad surfaces specifically suited to the application.



Attachment is available with automatic pressure adjustment.



Attachment can be fitted with load backrest model T479. The load backrest model T479.1 is suitable for fork positioners T160B and T466B up to 4.8T.



Attachment is designed with toe-in on the tips which should be taken into account when choosing the opening range.



# Telescopic Appliance Clamp T413GT

## Technical specifications

Model												
1T413GT	700	500	±100	380-2.380	970	1.000	28	690	2	232	270	435
1,5T413GT	1.250	500	±100	440-2.440	970	1.000	28	690	2	242	285	470
1,5T413GT	1.250	500	±100	410-2.610	1.200	1.000	28	690	2	242	285	486
1,5T413GT	1.250	500	±100	440-2.440	970	1.200	28	690	2	242	300	515
1,5T413GT	1.250	500	±100	410-2.610	1.200	1.200	28	690	2	242	295	530
2T413GT	1.250	700	±100	475-2.475	1.130	1.050	78	1.380	2	281	438	830
2T413GT	1.250	700	±100	450-2.750	1.330	1.050	78	1.380	2	281	429	871
3T413GT	1.800	700	±100	475-2.475	1.130	1.050	78	1.380	3	281	424	854
3T413GT	1.800	700	±100	450-2.750	1.330	1.050	78	1.380	3	281	416	895



## Qualities:

- Very good visibility conditions
- Extremely big opening ranges with small construction width
- Independent sideshift serially
- Load backrest optionally



- Add-on price for 100mm armlength / -height on request,
- Option: with automatic pressure switching (sensor technology) or attachment available with Smart Load Control (SLC), an autonomous system for controlling the clamp force (models 2T after design adaptation).
- For contact pad coatings see accessories in the pricelist.
- Also available without sideshift, model T403GT
- Load Backrest see model T179.

## Product Images

