


Adapter Carriage T 013.1 / T013.2

for changing to different ISO class

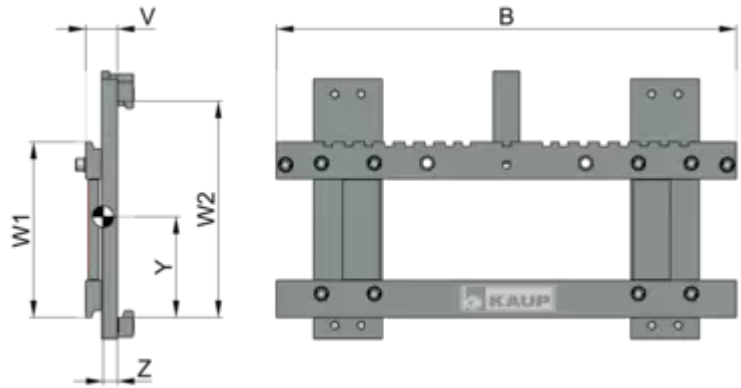

Specification:

KAUP Fork Carriages type T013.1 and T013.2 can be used as adapter for changing to different ISO classes. This makes it possible to use an existing attachment even when the forklift truck is changed.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sidesift upon request.



Attachment can be fitted with load backrest model T179.



Please note the additional information below the data table.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.

Technical specifications

Model									
2T013.1	2.500	600	980	2	3	68	32	245	103
2T013.1	2.500	600	920	2	3	68	31	246	101
2T013.1	2.500	600	1.040	2	3	68	32	244	106
2T013.1	2.500	600	1.150	2	3	68	36	237	126
2T013.1	2.500	600	1.020	2	3	68	32	244	105
2T013.2	2.500	600	980	3	2	75	41	242	130
2T013.2	2.500	600	1.040	3	2	75	41	242	135
2T013.2	2.500	600	1.150	3	2	75	43	243	152
2T013.1	2.500	600	1.600	2	3	75	42	227	175
4,8T013.1	5.000	600	1.150	3	4	93	45	277	185
2T013.2	2.500	600	920	3	2	75	40	242	126
4,8T013.1	5.000	600	1.200	3	4	93	46	274	189
4,8T013.1	5.000	600	1.350	3	4	93	48	269	205
2T013.2	2.500	600	1.020	3	2	75	41	242	132
4,8T013.1	5.000	600	1.800	3	4	103	59	241	302
4,8T013.2	5.000	600	1.350	4	3	100	57	351	260
4,8T013.2	5.000	600	1.800	4	3	110	66	356	346
2T013.2	2.500	600	1.600	3	2	85	51	246	227
4,8T013.1	5.000	600	1.300	3	4	93	48	270	202

Model									
4,8T013.1	5.000	600	1.600	3	4	103	58	251	277
4,8T013.1	5.000	600	2.000	3	4	103	60	246	312
4,8T013.2	5.000	600	1.400	4	3	100	57	351	266
4,8T013.2	5.000	600	1.550	4	3	100	59	352	282



Qualities:

- Solid construction for heavy duty operation
- Best visibility



- Load Backrest see model T179.
- Other construction widths available upon request.
- Fork Carriage with artificial lost load center distance available upon request.

Product Images

