


Triple Pallet Handler on a Pantograph T429/T149Z



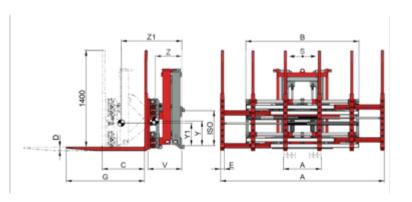

Specification:

The combination of the well known KAUP Multi Pallet Handler with a Pantograph T149Z creates an attachment with a multitude of application possibilities. It makes speedy loading of lorries or wagons from the side possible as well as loading and unloading double deep storage racks. As with all other KAUP Multi Pallet Handlers, the Triple Pallet Handler with Pantograph type T429B-1-2-3/T149Z has a durable and reliable construction with a minimum of required maintenance with maximum operation.



Mehrfach-Palettenhandling: For double deep loading and unloading of 1 or 2 pallets or e.g. of 1, 2 or 3 pallets.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. \pm 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment requires more than two additional hydraulic functions in order to operate. In this case one of the hydraulic circuits is split by use of a solenoid valve which is part of the attachment.



Please note the additional information below the data table.



Technical specifications

Model																	
3T429B-1-2-3/3T149Z	2.650	600	±100	560-2.410	1.660	50	60	1.150	750	3	525	375	933	404	363	1.442	
3T429B-1-2-3/3T149Z	2.650	600	±100	560-2.410	1.660	50	60	1.150	750	4	525	377	938	365	324	1.435	



Triple Pallet Handler on a Pantograph T429/T149Z



Product Images