


Pantograph T149 / T149Z



Specification:

The KAUP Pantograph type T149/T149Z is put into operation whenever Telescopic Forks or Reach Forks cannot be used due to the thickness of the forks. The knife forks of this attachment can pick up loads with very little bottom clearance and stacked double deep for transportation. Additionally the Pantograph T149/T149Z can be combined with a whole range of other KAUP attachments - for example Bale Clamps and Roll Clamps.

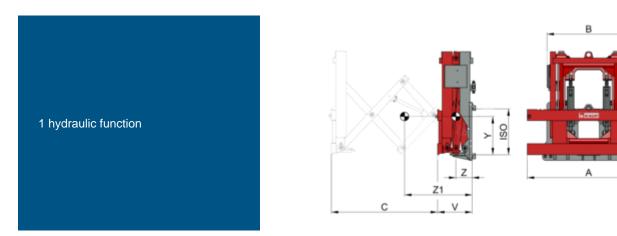

Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires one additional hydraulic function.



Attachment is available for operation in explosion hazardous areas.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sidesift upon request.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.






Technical specifications

Model											
2T149	2.000	600	1.040	730	950	970	2	310	146	609	450
2T149	2.000	600	1.040	730	950	970	3	310	146	609	450
2T149.1	1.200	600	1.040	730	1.200	1.060	2	310	141	711	458
2T149.1	1.200	600	1.040	730	1.200	1.060	3	310	141	711	458
3T149	3.000	600	1.150	1.130	800	970	3	435	198	565	680
4T149	3.500	600	1.350	1.130	800	970	4	435	189	539	745
2T149Z	3.000	500	1.100	890	620	1.170	2	354	149	436	470
2T149Z	3.000	500	1.100	890	620	1.170	3	354	149	436	470
3T149Z	3.500	600	1.150	1.120	750	1.290	3	355	165	519	704
3T149Z	3.500	600	1.150	1.120	750	1.290	4	355	167	525	697
8T149Z	6.000	600	1.500	1.050	1.045	1.538	4	465	236	741	1.320



Pantograph T149 / T149Z

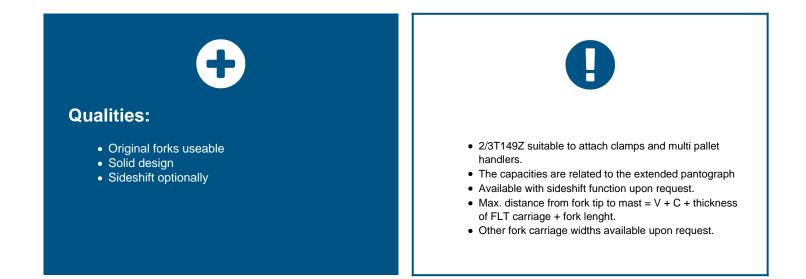

Product Images



