


Sideshifter, integral mounting T151 I

1 hydraulic function

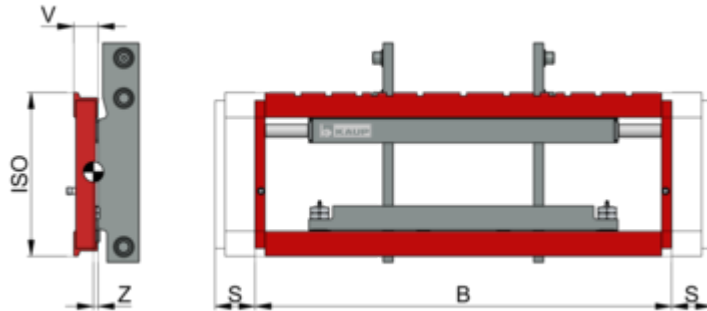

Specification:

KAUP offers the complete Sideshift program as integrated Sideshifters and as integrated Sideshifters with increased lost load centre.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires one additional hydraulic function.



Attachment can be fitted with load backrest model T179.



Attachment is available for operation in explosion hazardous areas.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.

Technical specifications

Model								
1,5T151I	1.750	500	1.040	±100	2	61	36	92
2,5T151I	2.500	500	1.150	±100	2	70	36	102
3T151I	3.000	500	1.150	±100	3	75	35	130
3,5T151I	3.500	500	1.150	±100	3	85	43	135
4,5T151I	4.500	500	1.350	±100	3	85	44	200
4,8T151I	5.000	500	1.350	±100	3	90	43	220
5T151I	5.000	600	1.350	±100	3	111	55	167
6T151I	6.000	600	1.550	±140	4	95	47	280
6T151I	6.000	600	1.650	±140	4	95	47	298
6T151I	6.000	600	1.800	±140	4	95	47	310
8T151I	8.000	600	1.800	±160	4	166	77	395
8T151I	8.000	600	2.260	±160	4	166	85	465
10T151I	8.000	1.100	1.860	±160	4	210	110	622
10T151I	8.000	1.100	2.260	±160	4	210	114	680
10T151I	8.000	1.100	2.400	±160	4	210	115	700
12T151I ⁽²⁾	12.000	600	2.600	±150	--	215	165	2.650
16T151I ⁽²⁾	16.000	600	2.800	±150	--	215	175	2.780



Qualities:

- Very good residual capacity
- Maximum visibility
- Minimum loss of friction due to roller guides extends the length of operation, especially on battery powered forklifts



- Higher capacities and other construction widths available upon request
- 1) CofG and weight measurements do not take the cheek plates into account.
- 2) Including forks, optional 180 x 80 x 1.200 mm or 180 x 90 x 1.200 mm.
- To determine the residual capacity the difference between measurement „V“ and the appropriate clearance of the serial fork carriage should be taken into account.
- Load Backrest see model T179.
- Optional in explosion proof version

Product Images

