


Bucket Discharging Device T167C

hydraulically operated for drop bottom buckets - 1 hydraulic function

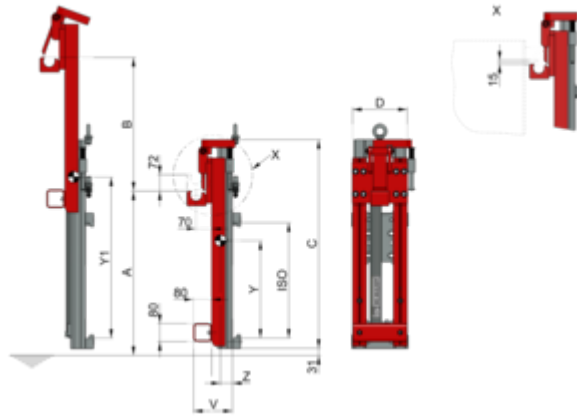

Specification:

The metal industry is a typical application area for KAUP Bucket Discharging Devices type T167C. This attachment is often used for the transportation of drop-bottom containers which are hydraulically opened.

The Bucket Discharging Device can be mounted directly on the fork carriage between the existing forks. They are often combined with a KAUP Fork Positioner.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires one additional hydraulic function.



Bucket Discharging Device T167C

Technical specifications

Model									
2T167C	1.500	725	920	242	2	171	55	95	590
2T167C	1.500	725	920	242	3	171	55	95	590
3T167C	2.500	715	970	242	2	181	59	118	650
3T167C	2.500	715	970	242	3	181	59	118	650
4T167C	3.500	730	1.320	283	3	196	62	210	1.050



Qualities:

- Low weight
- Low lost load centre



Product Images

