


## Fork Positioner T411 BZ

with valveblock sideshift dependent on the opening range - 2 hydraulic functions

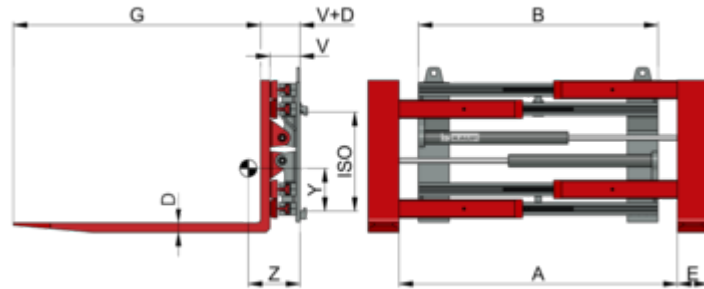

### Specification:

The KAUP hook-on Fork Positioner T411BZ is a robust attachment with large opening ranges for exceptionally heavy duty operation - ideal for uneven surfaces. The construction of this Fork Positioner predestines it for handling long loads and steel girders and especially for heavy duty operation in, for example, concrete plants.



Attachment has valveblock sideshift serially (integrated sideshift). Its design means that sideshift stroke is not available when the forks or arms are completely opened and/or completely closed.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment can be fitted with load backrest model T479. The load backrest model T479.1 is suitable for fork positioners T160B and T466B up to 4.8T.



Attachment is available for operation in explosion hazardous areas.



Attachment is specially designed for the function fork positioning and is not suitable for clamping between the forks.



Attachment is available with cylinder and sideshifter protection.



Attachment is designed with toe-in on the tips which should be taken into account when choosing the opening range.

## Technical specifications

Model													
4T411BZ	4.500	500	330-2.530	2.030	60	120	1.200	±550	3	168	184	264	805
4,8T411BZ	6.000	500	220-1.850	1.550	60	150	1.200	±407,5	3	184	209	275	885
5T411BZ	6.300	600	220-1.850	1.550	60	150	1.200	±407,5	4	184	203	321	925
5T411BZ	6.300	600	180-2.080	1.860	60	150	1.200	±475	4	184	195	325	1.010
5T411BZ	6.300	600	380-2.480 <sup>1)</sup>	1.860	60	150	1.200	±525	4	184	195	326	1.014
5T411BZ	6.300	600	310-2.510 <sup>1)</sup>	2.030	60	150	1.200	±550	4	184	191	328	1.046
6T411BZ	8.000	600	170-1.800	1.550	60	200	1.200	±407,5	4	194	233	314	1.165
6T411BZ	8.000	600	130-2.030	1.860	60	200	1.200	±475	4	194	226	318	1.225
6T411BZ	8.000	600	330-2.430 <sup>1)</sup>	1.860	60	200	1.200	±525	4	194	225	319	1.229
6T411BZ	8.000	600	200-3.800 <sup>1)</sup>	3.390	50	300	1.200	±900	4	194	218	315	1.545
8T411BZ	8.000	900	210-1.840 <sup>1)</sup>	1.550	70	200	1.200	±407,5	4	230	230	333	1.435
8T411BZ	8.000	900	330-2.530 <sup>1)</sup>	2.000	70	200	1.200	±550	4	230	219	339	1.564
8T411BZ	8.000	900	400-2.900 <sup>1)</sup>	2.400	70	200	1.200	±625	4	230	211	344	1.672
8T411BZ <sup>2)</sup>	5.000	1.200	2.600-5.600 <sup>1)</sup>	4.500	70	200	1.200	±750	4	230	135	380	2.515



## Qualities:

- Very large opening ranges
- Good residual capacity
- Valve block sideshift - dependent on opening range - serially
- Opening range significantly larger than the construction width
- Independent sideshift optionally
- Screw-on forks optional



- 1) Transport of europallets lengthwise not possible.
- 2) Alternatively available with third fork in the centre. (add-on-price)
- Not suitable for clamping between the forks.
- With screw-on forks available upon request T411BZA
- Load Backrest see model T179.
- Also available without sideshift, model T401BZ

## Product Images

