


## Rotating Roll Clamp T458B

360° rotation continuous - short arm  
hydraulically adjustable in any turning  
position - 2 hydraulic functions

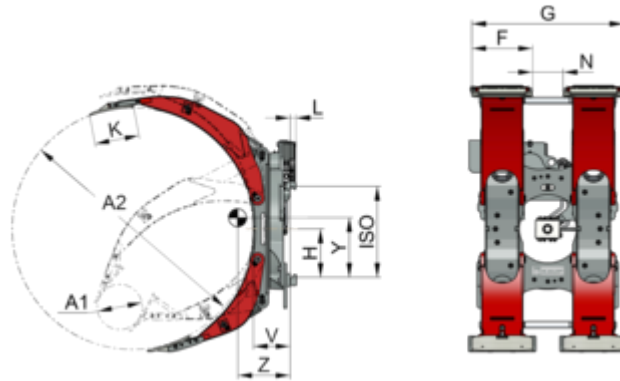

### Specification:

With the new view-optimised designed KAUP Rotating Roll Clamp T458B roles and pipes can be taken up and transported carefully. This makes this attachment indispensable wherever you are dealing with the handling of paper rolls, concrete pipes and other similar items.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sidesift upon request.



Attachment can be fitted with different types of contact pad surfaces specifically suited to the application.



Attachment is available restricted to 180° rotation.



# Rotating Roll Clamp T458B

## Technical specifications

| Model    |       |       |           |     |     |     |     |    |     |       |     |   |     |     |     |     |
|----------|-------|-------|-----------|-----|-----|-----|-----|----|-----|-------|-----|---|-----|-----|-----|-----|
| 1T458B   | 1.200 | 675   | 200-1.350 | 300 | 700 | 211 | 250 | 31 | 100 | 3.760 | 4,8 | 2 | 195 | 301 | 297 | 421 |
| 1T458B   | 1.100 | 725   | 200-1.450 | 300 | 700 | 211 | 250 | 31 | 100 | 3.760 | 4,8 | 2 | 195 | 279 | 300 | 426 |
| 1,5T458B | 1.550 | 675   | 200-1.350 | 300 | 700 | 211 | 250 | 31 | 100 | 3.760 | 4,8 | 2 | 195 | 301 | 298 | 424 |
| 1,5T458B | 1.500 | 725   | 200-1.450 | 300 | 700 | 211 | 250 | 31 | 100 | 3.760 | 4,8 | 2 | 195 | 313 | 305 | 429 |
| 2T458B   | 2.400 | 675   | 200-1.350 | 340 | 850 | 270 | 250 | 31 | 170 | 4.810 | 6,1 | 2 | 203 | 341 | 275 | 547 |
| 2T458B   | 2.200 | 725   | 200-1.450 | 340 | 850 | 270 | 250 | 31 | 170 | 4.810 | 6,1 | 2 | 203 | 344 | 282 | 557 |
| 2T458B   | 2.050 | 750   | 200-1.500 | 340 | 850 | 270 | 250 | 31 | 170 | 4.810 | 6,1 | 2 | 203 | 352 | 287 | 563 |
| 2T458B   | 2.000 | 800   | 200-1.600 | 340 | 850 | 270 | 250 | 31 | 170 | 4.810 | 6,1 | 2 | 203 | 354 | 297 | 586 |
| 2T458B   | 1.750 | 915   | 200-1.830 | 340 | 850 | 270 | 250 | 31 | 170 | 4.810 | 6,1 | 2 | 203 | 358 | 321 | 609 |
| 2T458B   | 2.400 | 675   | 200-1.350 | 340 | 850 | 272 | 250 | 32 | 170 | 4.810 | 6,1 | 3 | 203 | 354 | 271 | 557 |
| 2T458B   | 2.200 | 725   | 200-1.450 | 340 | 850 | 272 | 250 | 32 | 170 | 4.810 | 6,1 | 3 | 203 | 357 | 278 | 567 |
| 2T458B   | 2.050 | 750   | 200-1.500 | 340 | 850 | 272 | 250 | 32 | 170 | 4.810 | 6,1 | 3 | 203 | 364 | 283 | 573 |
| 2T458B   | 2.000 | 800   | 200-1.600 | 340 | 850 | 272 | 250 | 32 | 170 | 4.810 | 6,1 | 3 | 203 | 366 | 293 | 596 |
| 2T458B   | 1.750 | 915   | 200-1.830 | 340 | 850 | 272 | 250 | 32 | 170 | 4.810 | 6,1 | 3 | 203 | 369 | 317 | 619 |
| 3T458B   | 3.200 | 675   | 200-1.350 | 340 | 850 | 338 | 250 | 34 | 170 | 5.590 | 7,1 | 3 | 207 | 245 | 419 | 677 |
| 3T458B   | 3.100 | 725   | 200-1.450 | 340 | 850 | 338 | 250 | 34 | 170 | 5.590 | 7,1 | 3 | 207 | 255 | 430 | 700 |
| 3T458B   | 2.800 | 800   | 220-1.600 | 340 | 850 | 338 | 250 | 34 | 170 | 5.590 | 7,1 | 3 | 207 | 269 | 430 | 722 |
| 3T458B   | 2.500 | 915   | 200-1.830 | 340 | 850 | 338 | 250 | 34 | 170 | 5.590 | 7,1 | 3 | 207 | 291 | 428 | 760 |
| 3T458B   | 2.100 | 1.100 | 550-2.200 | 340 | 850 | 338 | 250 | 34 | 170 | 5.590 | 7,1 | 3 | 207 | 326 | 444 | 800 |

| Model  |       |       |           |     |       |     |     |    |     |        |      |   |     |     |     |       |
|--------|-------|-------|-----------|-----|-------|-----|-----|----|-----|--------|------|---|-----|-----|-----|-------|
| 4T458B | 4.200 | 675   | 220-1.350 | 420 | 1.000 | 384 | 300 | 41 | 160 | 8.800  | 10,3 | 3 | 268 | 311 | 468 | 1.046 |
| 4T458B | 3.900 | 725   | 220-1.450 | 420 | 1.000 | 384 | 300 | 41 | 160 | 8.800  | 10,3 | 3 | 268 | 313 | 471 | 1.038 |
| 4T458B | 3.500 | 800   | 250-1.600 | 420 | 1.000 | 384 | 300 | 41 | 160 | 8.800  | 10,3 | 3 | 268 | 328 | 473 | 1.070 |
| 4T458B | 3.400 | 915   | 300-1.830 | 420 | 1.000 | 384 | 300 | 41 | 160 | 8.800  | 10,3 | 3 | 268 | 352 | 472 | 1.136 |
| 4T458B | 2.800 | 1.100 | 600-2.200 | 420 | 1.000 | 384 | 300 | 41 | 160 | 8.800  | 10,3 | 3 | 268 | 392 | 481 | 1.206 |
| 4T458B | 4.200 | 675   | 220-1.350 | 420 | 1.000 | 350 | 300 | 43 | 160 | 8.800  | 10,3 | 4 | 266 | 305 | 450 | 1.065 |
| 4T458B | 3.900 | 725   | 220-1.450 | 420 | 1.000 | 350 | 300 | 43 | 160 | 8.800  | 10,3 | 4 | 266 | 307 | 453 | 1.057 |
| 4T458B | 3.500 | 800   | 250-1.600 | 420 | 1.000 | 350 | 300 | 43 | 160 | 8.800  | 10,3 | 4 | 266 | 322 | 455 | 1.089 |
| 4T458B | 3.400 | 915   | 300-1.830 | 420 | 1.000 | 350 | 300 | 43 | 160 | 8.800  | 10,3 | 4 | 266 | 346 | 455 | 1.155 |
| 4T458B | 2.800 | 1.100 | 600-2.200 | 420 | 1.000 | 350 | 300 | 43 | 160 | 8.800  | 10,3 | 4 | 266 | 386 | 465 | 1.225 |
| 5T458B | 4.750 | 800   | 250-1.600 | 420 | 1.000 | 350 | 300 | 46 | 160 | 10.560 | 12,9 | 4 | 318 | 366 | 425 | 1.183 |
| 5T458B | 4.200 | 915   | 320-1.830 | 420 | 1.000 | 350 | 300 | 46 | 160 | 10.560 | 12,9 | 4 | 318 | 388 | 428 | 1.245 |
| 5T458B | 3.900 | 1.000 | 400-2.000 | 420 | 1.000 | 350 | 300 | 46 | 160 | 10.560 | 12,9 | 4 | 318 | 405 | 432 | 1.276 |
| 6T458B | 5.900 | 800   | 270-1.600 | 420 | 1.000 | 350 | 300 | 45 | 160 | 17.590 | 20,7 | 4 | 318 | 351 | 428 | 1.351 |
| 6T458B | 4.600 | 1.100 | 600-2.200 | 420 | 1.000 | 350 | 300 | 45 | 160 | 17.590 | 20,7 | 4 | 318 | 407 | 438 | 1.490 |



## Qualities:

- Very good visibility conditions
- Favourable lost load and weight
- Solid, slender arm construction
- Different contact pad coatings available
- Rotation 360° endlessly
- Limitation on rotation 180° optionally
- Service friendly



- Optional: contact pad coatings (standard polyurethane coating Poly-1).
- Capacity related to max. roll diameter.
- Optional: The short arm can be hydraulically adjusted at a rotation angle of 45°.
- Optional: restricted to 180° rotation, continuous contact pads.
- For taking up horizontal rolls, 5-degree mast forward tilt is required.
- Pressure plate coverings see under accessories.
- Attachment with sideshift Model T498B (add-on price).

## Product Images

