


Rotating Roll Clamp T458B-2

360° rotation continuous - short arm
hydraulically adjustable in any turning
position - split pressure plate - 2
hydraulic funct

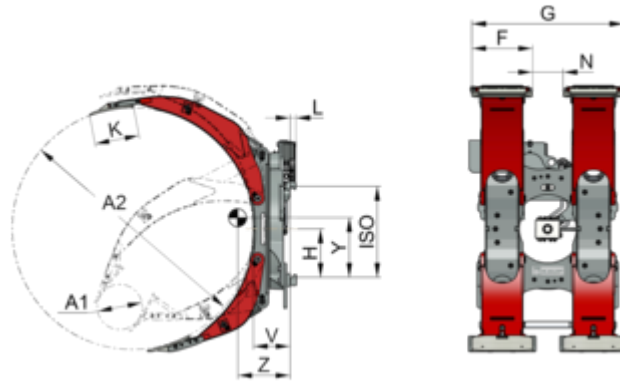

Specification:

With the new view-optimised designed KAUP Rotating Roll Clamp T458B-2 roles and pipes can be taken up and transported carefully. The contact pad of this attachment is divided and allows in such a way that at the same time two roles - also with different diameters - can be transported stacked. This makes this attachment everywhere inalienable where the dandling of paper rolls, concrete tubes and similar is essential.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sidesift upon request.



Attachment can be fitted with different types of contact pad surfaces specifically suited to the application.



Attachment is available restricted to 180° rotation.



Rotating Roll Clamp T458B-2

Technical specifications

Model																
1T458B-2	1.200	675	200-1.350	300	700	211	250	31	100	3.760	4,8	2	195	300	296	421
1T458B-2	1.100	725	200-1.450	300	700	211	250	31	100	3.760	4,8	2	195	278	299	427
1,5T458B-2	1.550	675	200-1.350	300	700	211	250	31	100	3.760	4,8	2	195	300	296	424
1,5T458B-2	1.500	725	200-1.450	300	700	211	250	31	100	3.760	4,8	2	195	314	306	430
2T458B-2	2.400	675	200-1.350	340	850	270	250	31	170	4.810	6,1	2	203	339	274	547
2T458B-2	2.200	725	200-1.450	340	850	270	250	31	170	4.810	6,1	2	203	342	281	556
2T458B-2	2.050	750	200-1.500	340	850	270	250	31	170	4.810	6,1	2	203	350	286	562
2T458B-2	2.000	800	200-1.600	340	850	270	250	31	170	4.810	6,1	2	203	352	296	586
2T458B-2	1.750	915	200-1.830	340	850	270	250	31	170	4.810	6,1	2	203	356	320	608
2T458B-2	2.400	675	200-1.350	340	850	272	250	32	170	4.810	6,1	3	203	352	270	556
2T458B-2	2.200	725	200-1.450	340	850	272	250	32	170	4.810	6,1	3	203	355	277	566
2T458B-2	2.050	750	200-1.500	340	850	272	250	32	170	4.810	6,1	3	203	363	282	572
2T458B-2	2.000	800	200-1.600	340	850	272	250	32	170	4.810	6,1	3	203	364	292	595
2T458B-2	1.750	915	200-1.830	340	850	272	250	32	170	4.810	6,1	3	203	368	316	618
3T458B-2	3.200	675	200-1.350	340	850	338	250	34	170	5.590	7,1	3	207	244	417	677
3T458B-2	3.100	725	200-1.450	340	850	338	250	34	170	5.590	7,1	3	207	254	428	699
3T458B-2	2.800	800	220-1.600	340	850	338	250	34	170	5.590	7,1	3	207	268	428	721
3T458B-2	2.500	915	200-1.830	340	850	338	250	34	170	5.590	7,1	3	207	290	426	760
3T458B-2	2.100	1.100	550-2.200	340	850	338	250	34	170	5.590	7,1	3	207	276	442	799

Model																
4T458B-2	4.200	675	220-1.350	420	1.000	384	300	41	160	8.800	10,3	3	268	310	466	1.045
4T458B-2	3.900	725	220-1.450	420	1.000	384	300	41	160	8.800	10,3	3	268	312	469	1.037
4T458B-2	3.500	800	250-1.600	420	1.000	384	300	41	160	8.800	10,3	3	268	327	471	1.069
4T458B-2	3.400	915	300-1.830	420	1.000	384	300	41	160	8.800	10,3	3	268	351	470	1.135
4T458B-2	2.800	1.100	600-2.200	420	1.000	384	300	41	160	8.800	10,3	3	268	391	479	1.205
4T458B-2	4.200	675	220-1.350	420	1.000	350	300	43	160	8.800	10,3	4	266	304	448	1.063
4T458B-2	3.900	725	220-1.450	420	1.000	350	300	43	160	8.800	10,3	4	266	306	451	1.055
4T458B-2	3.500	800	250-1.600	420	1.000	350	300	43	160	8.800	10,3	4	266	321	453	1.087
4T458B-2	3.400	915	300-1.830	420	1.000	350	300	43	160	8.800	10,3	4	266	345	453	1.153
4T458B-2	2.800	1.100	600-2.200	420	1.000	350	300	43	160	8.800	10,3	4	266	385	463	1.223
5T458B-2	4.750	800	250-1.600	420	1.000	350	300	46	160	10.560	12,9	4	318	365	423	1.182
5T458B-2	4.200	915	320-1.830	420	1.000	350	300	46	160	10.560	12,9	4	318	387	426	1.243
5T458B-2	3.900	1.000	400-2.000	420	1.000	350	300	46	160	10.560	12,9	4	318	404	430	1.274
6T458B-2	5.900	800	270-1.600	420	1.000	350	300	45	160	17.590	20,7	4	318	350	426	1.349
6T458B-2	4.600	1.100	600-2.200	420	1.000	350	300	45	160	17.590	20,7	4	318	406	436	1.489



Qualities:

- Very good visibility conditions
- Favourable lost load and weight
- Solid, slender arm construction
- Different contact pad coatings available
- Rotation 360° endlessly
- Limitation on rotation 180° optionally
- Service friendly



- 1) Version with fixed short arm
- Optional: contact pad coatings (standard polyurethane coating Poly-1)
- Capacity related to max. roll diameter.
- Optional: The short arm can be hydraulically adjusted at a rotation angle of 45°.
- Optional: restricted to 180° rotation, Tissue version, short arm with continuous contact pads.
- For taking up horizontal rolls, 5-degree mast forward tilt is required.
- Pressure plate coverings see under accessories.
- Attachment with sideshift Model T498B-2 (add-on price).

Product Images

