


Rotating Tissue Roll Clamp T458BT

Rotation 360° endless - short arm hydraulically adjustable in each turning position (BCT = fixed) - continuous contact pad - 2 hydraulic functions

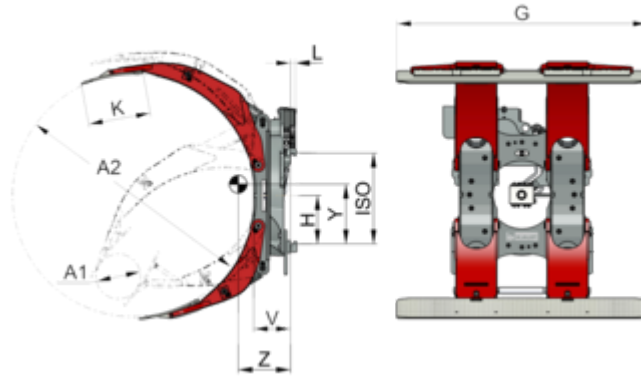

Specification:

The new view-optimised designed KAUP Rotating Tissue Roll Clamp T458BT is well suited especially for the careful admission and the transport of paper and cellulose roles.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sidesift upon request.



Attachment can be fitted with different types of contact pad surfaces specifically suited to the application.



Attachment is available restricted to 180° rotation.



Rotating Tissue Roll Clamp T458BT

Technical specifications

Model													
1T458BCT	1.200	675	450-1.350	850	300	33	208	6.013	7,6	2	185	293	407
1T458BCT	1.100	725	500-1.450	850	300	33	208	6.013	7,6	2	185	296	423
2T458BCT	2.000	800	650-1.600	1.400	300	33	270	7.700	9,7	2	207	385	679
2T458BT	2.000	800	220-1.600	1.400	300	33	270	7.700	9,7	2	207	388	685
2T458BT	1.700	915	350-1.830	1.400	300	33	270	7.700	9,7	2	207	431	731
2T458BCT	2.000	800	650-1.600	1.400	300	33	270	7.700	9,7	3	207	385	679
2T458BT	2.000	800	220-1.600	1.400	300	33	270	7.700	9,7	3	207	388	685
2T458BT	1.700	915	350-1.830	1.400	300	33	270	7.700	9,7	3	207	431	731
3T458BT	2.500	915	300-1.830	1.400	300	36	338	8.950	11,3	3	242	426	876
3T458BT	2.100	1.100	800-2.200	1.400	300	36	338	8.950	11,3	3	242	485	968
4T458BT	3.400	915	350-1.830	1.800	350	36	383	12.591	11,2	3	255	470	1.286
4T458BT	2.800	1.100	800-2.200	1.800	350	36	383	12.591	11,2	3	255	533	1.350
4T458BT	3.400	915	350-1.830	1.800	350	36	516	12.591	11,2	4	255	470	1.286
4T458BT	2.800	1.100	800-2.200	1.800	350	36	516	12.591	11,2	4	255	533	1.350
5T458BT	3.700	1.000	500-2.000	1.800	350	40	350	12.591	11,2	4	315	536	1.402
5T458BT	3.100	1.200	650-2.400	1.800	350	40	350	12.591	11,2	4	315	565	1.491



Qualities:

- Very good visibility conditions
- Favorable lost load and weight
- Solid, slender arm construction
- Different contact pad coatings available
- Rotation 360° endlessly
- Limitation on rotation 180° optionally
- Service friendly



- BCT Version with fixed short arm.
- Capacity related to max. roll diameter.
- Optional: The short arm can be hydraulically adjusted at a rotation angle of 45°.
- All models available restricted to 180°.
- For taking up horizontal rolls, 5-degree mast forward tilt is required.
- Recommended length of contact pads: 70 % of roll width.
- Pressure plate coverings see under accessories.
- Attachment with sideshift Model T498BT/T498BCT (add-on price).

Product Images

