


## Rotating Roll Clamp T458 P

360° rotation continuous - with parallel guided arms - 2 hydraulic functions

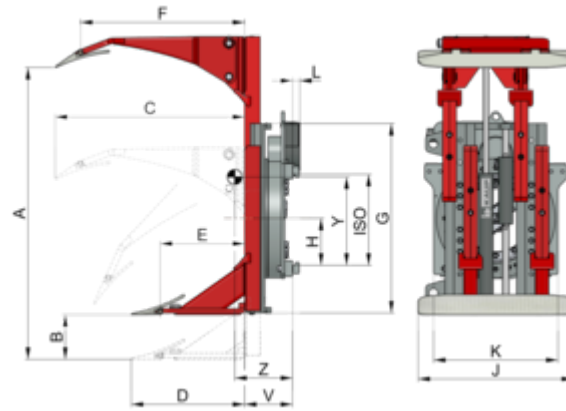

### Specification:

The models of the class T458P/T258 of KAUP own an essential differentiation sign compared with other rotating roll clamps: Independent of the used opening range the available clamp strength is always commensurate. This allows, that the carried product - no matter of which size - can always be taken up with the same strength carefully and can be transported certainly by parallel guided clamp arms.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sidesift upon request.



Attachment can be fitted with different types of contact pad surfaces specifically suited to the application.



Attachment is available restricted to 180° rotation.



# Rotating Roll Clamp T458 P

## Technical specifications

| Model    |        |       |           |       |     |       |       |    |        |      |   |     |     |       |     |       |       |     |       |       |
|----------|--------|-------|-----------|-------|-----|-------|-------|----|--------|------|---|-----|-----|-------|-----|-------|-------|-----|-------|-------|
| 1T458P   | 1.200  | 600   | 350-1.200 | 1.315 | 213 | 700   | 560   | 33 | 6.013  | 7,6  | 2 | 215 | 259 | 407   | 200 | 855   | 510   | 380 | 740   | 850   |
| 1,5T458P | 1.200  | 675   | 300-1.350 | 1.425 | 213 | 700   | 560   | 33 | 6.013  | 7,6  | 2 | 215 | 272 | 421   | 200 | 925   | 580   | 450 | 810   | 970   |
| 2T458P   | 2.000  | 750   | 300-1.500 | 1.570 | 269 | 700   | 790   | 33 | 7.700  | 9,7  | 2 | 232 | 279 | 543   | 200 | 1.005 | 670   | 540 | 890   | 1.130 |
| 2T458P   | 2.000  | 750   | 300-1.500 | 1.570 | 269 | 700   | 790   | 33 | 7.700  | 9,7  | 3 | 232 | 279 | 543   | 200 | 1.005 | 670   | 540 | 890   | 1.130 |
| 3T458P   | 2.500  | 750   | 300-1.500 | 1.600 | 338 | 990   | 1.010 | 40 | 8.950  | 11,3 | 3 | 279 | 335 | 885   | 200 | 995   | 655   | 540 | 890   | 1.130 |
| 4T458P   | 3.200  | 935   | 430-1.870 | 1.985 | 328 | 800   | 870   | 36 | 8.950  | 11,3 | 3 | 292 | 346 | 1.128 | 200 | 1.290 | 865   | 750 | 1.155 | 1.330 |
| 10T258   | 8.200  | 1.150 | 900-2.300 | 2.700 | 328 | 1.050 | 1.120 | -  | 23.000 | 32,8 | - | 360 | 350 | 3.500 | 300 | 1.485 | 1.010 | -   | -     | 1.800 |
| 15T258   | 11.000 | 1.150 | 900-2.300 | 2.700 | 328 | 1.500 | 1.120 | -  | 23.000 | 32,8 | - | 450 | 500 | 8.200 | 400 | 1.485 | 1.010 | -   | -     | 2.230 |
| 20T258   | 15.000 | 1.150 | 900-2.300 | 2.700 | 328 | 1.500 | 1.350 | -  | 34.500 | 46,2 | - | 520 | 600 | 9.500 | 400 | 1.485 | 1.010 | -   | -     | 2.230 |



## Qualities:

- Robust construction
- Solid and very slender arm construction
- Rotation 360° endlessly



- Capacity related to max. roll diameter.
- Long arm mechanically adjustable.
- Pressure plate coverings see under accessories.
- Available as non rotating clamp model T418.
- Also available with sideshift, model T498P on request

## Product Images

