


Appliance- / Carton Clamp T414-2L

with independent sideshift - rubber coated arms - two contact pads per swivelling arm - 2 hydraulic functions

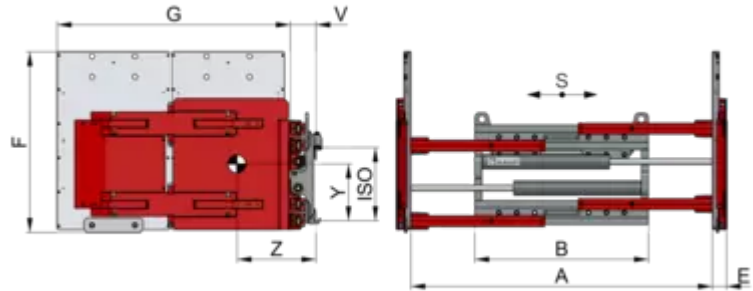

Specification:

With the KAUP Appliance-/Carton Clamp T414-2L wide loads with different load masses can be taken up. Because with two contact pads per clamp arm this attachment is able to compensate existing tolerance.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. ± 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is available with Smart Load Control (SLC), an autonomous system for controlling the clamp force. The required pressures are always adjusted autonomously depending on the load.



Attachment can be fitted with load backrest model T479. The load backrest model T479.1 is suitable for fork positioners T160B and T466B up to 4.8T.



Attachment can be fitted with different types of contact pad surfaces specifically suited to the application.



Attachment is available with automatic pressure adjustment.



Attachment is designed with toe-in on the tips which should be taken into account when choosing the opening range.



Appliance- / Carton Clamp T414-2L

Technical specifications

Model												
1,5T414-2L	1.250	500	±100	480-1.660	970	60	1.000	1.000	2	133	345	495
1,5T414-2L	1.250	500	±100	480-1.660	970	60	1.000	1.200	2	133	401	535
1,5T414-2L	1.250	500	±100	480-1.660	970	60	1.200	1.200	2	133	472	599
1,5T414-2L	1.250	500	±100	480-1.660	970	60	1.200	1.380	2	133	492	647
1,5T414-2L	1.250	500	±100	330-1.430	1.040	60	1.000	1.000	2	133	344	497
1,5T414-2L	1.250	500	±100	330-1.430	1.040	60	1.000	1.200	2	133	400	538
1,5T414-2L	1.250	500	±100	330-1.430	1.040	60	1.200	1.200	2	133	470	602
1,5T414-2L	1.250	500	±100	330-1.430	1.040	60	1.200	1.380	2	133	490	649
1,5T414-2L	1.250	500	±100	410-1.590	1.040	60	1.000	1.000	2	133	344	497
1,5T414-2L	1.250	500	±100	410-1.590	1.040	60	1.000	1.200	2	133	400	538
1,5T414-2L	1.250	500	±100	410-1.590	1.040	60	1.200	1.200	2	133	470	602
1,5T414-2L	1.250	500	±100	410-1.590	1.040	60	1.200	1.380	2	133	490	649
1,5T414-2L	1.250	500	±100	490-1.840	1.130	60	1.000	1.000	2	133	341	507
1,5T414-2L	1.250	500	±100	490-1.840	1.130	60	1.000	1.200	2	133	397	547
1,5T414-2L	1.250	500	±100	490-1.840	1.130	60	1.200	1.200	2	133	467	611
1,5T414-2L	1.250	500	±100	490-1.840	1.130	60	1.200	1.380	2	133	486	659
1,5T414-2L	1.250	500	±100	470-1.870	1.200	60	1.000	1.000	2	133	340	516
1,5T414-2L	1.250	500	±100	470-1.870	1.200	60	1.000	1.200	2	133	395	556
1,5T414-2L	1.250	500	±100	470-1.870	1.200	60	1.200	1.200	2	133	465	620

Model												
1,5T414-2L	1.250	500	±100	470-1.870	1.200	60	1.200	1.380	2	133	484	668
2T414-2L	2.000	500	±100	525-1.725	970	60	1.000	1.000	2	143	337	565
2T414-2L	2.000	500	±100	525-1.725	970	60	1.000	1.000	3	143	337	565
2T414-2L	2.000	500	±100	525-1.725	970	60	1.000	1.200	3	143	397	610
2T414-2L	2.000	500	±100	525-1.725	970	60	1.200	1.200	3	143	428	674
2T414-2L	2.000	500	±100	525-1.725	970	60	1.200	1.380	3	143	481	731
2T414-2L	2.000	500	±100	555-1.855	1.040	60	1.000	1.000	3	143	335	570
2T414-2L	2.000	500	±100	555-1.855	1.040	60	1.000	1.200	3	143	395	615
2T414-2L	2.000	500	±100	555-1.855	1.040	60	1.200	1.200	3	143	426	679
2T414-2L	2.000	500	±100	555-1.855	1.040	60	1.200	1.380	3	143	479	736
2T414-2L	2.000	500	±100	465-1.765	1.130	60	1.000	1.000	3	143	333	575
2T414-2L	2.000	500	±100	465-1.765	1.130	60	1.000	1.200	3	143	392	620
2T414-2L	2.000	500	±100	465-1.765	1.130	60	1.200	1.200	3	143	423	684
2T414-2L	2.000	500	±100	465-1.765	1.130	60	1.200	1.380	3	143	476	741
2T414-2L	2.000	500	±100	465-1.965	1.330	60	1.000	1.000	3	143	319	599
2T414-2L	2.000	500	±100	465-1.965	1.330	60	1.000	1.200	3	143	378	644
2T414-2L	2.000	500	±100	465-1.965	1.330	60	1.200	1.200	3	143	409	708
2T414-2L	2.000	500	±100	465-1.965	1.330	60	1.200	1.380	3	143	462	765
2T414-2L	2.000	500	±100	575-2.375	1.520	60	1.000	1.000	3	143	312	623
2T414-2L	2.000	500	±100	575-2.375	1.520	60	1.000	1.200	3	143	371	668
2T414-2L	2.000	500	±100	575-2.375	1.520	60	1.200	1.200	3	143	402	732
2T414-2L	2.000	500	±100	575-2.375	1.520	60	1.200	1.380	3	143	455	789
2T414-2L	2.000	500	±100	525-1.725	970	60	1.000	1.200	2	143	397	610

Model												
2T414-2L	2.000	500	±100	525-1.725	970	60	1.200	1.200	2	143	428	674
2T414-2L	2.000	500	±100	525-1.725	970	60	1.200	1.380	2	143	481	731
2T414-2L	2.000	500	±100	555-1.855	1.040	60	1.000	1.000	2	143	335	570
2T414-2L	2.000	500	±100	555-1.855	1.040	60	1.000	1.200	2	143	395	615
2T414-2L	2.000	500	±100	555-1.855	1.040	60	1.200	1.200	2	143	426	679
2T414-2L	2.000	500	±100	555-1.855	1.040	60	1.200	1.380	2	143	479	736
2T414-2L	2.000	500	±100	465-1.765	1.130	60	1.000	1.000	2	143	333	575
2T414-2L	2.000	500	±100	465-1.765	1.130	60	1.000	1.200	2	143	392	620
2T414-2L	2.000	500	±100	465-1.765	1.130	60	1.200	1.200	2	143	423	684
2T414-2L	2.000	500	±100	465-1.765	1.130	60	1.200	1.380	2	143	476	741
2T414-2L	2.000	500	±100	465-1.965	1.330	60	1.000	1.000	2	143	319	599
2T414-2L	2.000	500	±100	465-1.965	1.330	60	1.000	1.200	2	143	378	644
2T414-2L	2.000	500	±100	465-1.965	1.330	60	1.200	1.200	2	143	409	708
2T414-2L	2.000	500	±100	465-1.965	1.330	60	1.200	1.380	2	143	462	765
2T414-2L	2.000	500	±100	575-2.375	1.520	60	1.000	1.000	2	143	312	623
2T414-2L	2.000	500	±100	575-2.375	1.520	60	1.000	1.200	2	143	371	668
2T414-2L	2.000	500	±100	575-2.375	1.520	60	1.200	1.200	2	143	402	732
2T414-2L	2.000	500	±100	575-2.375	1.520	60	1.200	1.380	2	143	455	789



Qualities:

- Low lost load - very good residual capacities
- Good visibility conditions
- Independent sideshift serially
- Load backrest optionally



- Add-on price for 100mm armlength / -height on request,
- Option: with automatic pressure switching (sensor technology) or attachment available with Smart Load Control (SLC), an autonomous system for controlling the clamp force (models 2T after design adaptation).
- For contact pad coatings see accessories in the pricelist.
- Also available without sideshift, model T404-2L
- Load Backrest see model T179.

Product Images

