


## Appliance Clamp tiltable 2T413G-2H

with independent sideshift - rubber coated arms - both arms 90° forward tipping - 2 hydraulic functions + solenoid valve

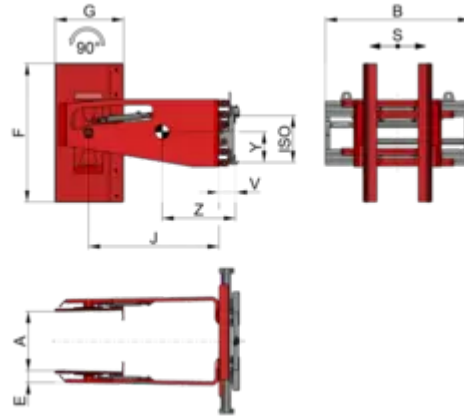

### Specification:

With the KAUP Appliance Clamp tiltable 2T413G-2H it is possible to take up loading property and to set down 90° recumbent safely. Therefore, this attachment is suited especially to move stored goods or to load and unload truck, carriages and containers and to use, besides, the height optimally.



Attachment requires more than two additional hydraulic functions in order to operate. In this case one of the hydraulic circuits is split by use of a solenoid valve which is part of the attachment.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g.  $\pm 100$  mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is hydraulically tiltable by 90°



Attachment can be fitted with different types of contact pad surfaces specifically suited to the application.



# Appliance Clamp tiltable 2T413G-2H

## Technical specifications

Model														
2T413G-2H	300	1.000	±100	540-2.160	1.260	1.200	102	580	1.000	2	143	670	265	790
2T413G-2H	300	1.000	±100	540-2.160	1.260	1.200	102	580	1.000	3	143	670	265	790



## Qualities:

- Independent sideshift serially
- Contact pads of the clamp arms up to 90° hydraulically tiltable
- Load backrest optionally



- Add-on price for 100mm armlength / -height on request,
- For contact pad coatings see accessories in the pricelist.
- Also available without sideshift, model 2T403G-2H
- Load Backrest see model T179.

## Product Images

