


Block & Brick Arms T102UH

underslung Block & Brick Arms

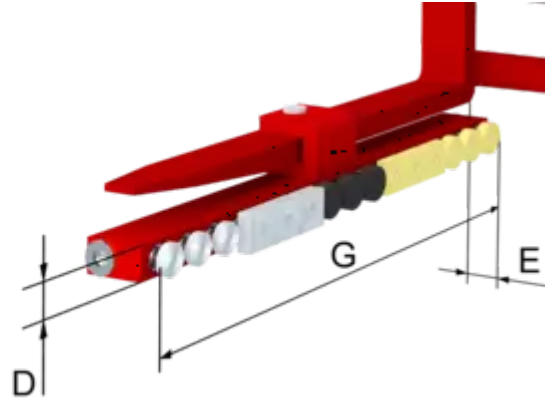

Specification:

KAUP underslung Block & Brick Arms T102UH are designed with mechano-hydraulic equilibration with different coatings which compensate irregular contours so that the load can be clamped optimally.



Block & Brick Arms T102UH

Technical specifications

Model				
2T102UH	1.265	-	90	170



Qualities:

- Simple assembly
- Solid construction
- Complete range of different buffers for compensation



- 1) *Height D depends on coating / buffers: HG = Rubber coating Ø 75 mm, HV = Polyurethane coating Ø 75 mm, HV-Q = Square Polyure
- 2) Length G depends on the number of pistons (): available arm length 937 (11), 1.019 (12), 1.101 (13), 1.183 (14), 1.265 (15)

Product Images

