


Block & Brick Clamp T412UH

with independent sideshift - with slip-on underslung arms - to handle building material - 2 hydraulic functions

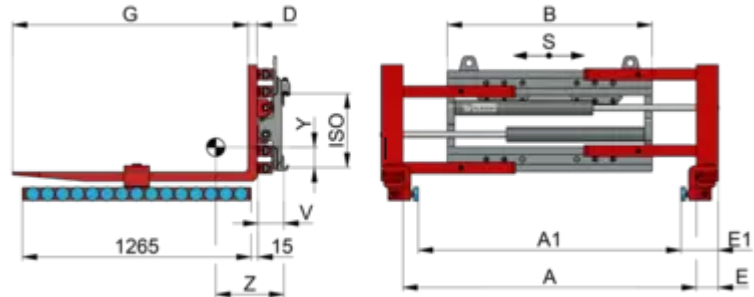

Specification:

With the KAUP Block & Brick Clamp T412UH it is easy to change between pick up of pallets or grate boxes and handling packets of blocks because this attachment can be used as a Block Clamp and also as a Fork Clamp. Therefore they are typically used in the building industry.

The underslung Block Arms with mechano-hydraulic equalising are suitable for handling small sized blocks. They are mounted oscillating on the carrying part of the existing forks and secured.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. ± 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment can be fitted with load backrest model T479. The load backrest model T479.1 is suitable for fork positioners T160B and T466B up to 4.8T.



Attachment is available with cylinder and sideshifter protection.



Attachment is designed with toe-in on the tips which should be taken into account when choosing the opening range.



Block & Brick Clamp T412UH

Technical specifications

Model																		
1,5T412UH	2.300	500	1.250	500	±100	140-1.320	320-1.500	970	45	120	210	1.200	2	133	456	74	500	
2T412UH	2.800	500	2.000	500	±100	140-1.440	320-1.620	1.130	50	120	210	1.200	2	143	432	89	564	
2T412UH	2.800	500	2.000	500	±100	140-1.440	320-1.620	1.130	50	120	210	1.200	3	143	432	89	564	
3T412UH	3.600	500	2.500	500	±100	80-1.380	260-1.560	1.130	50	150	235	1.200	3	152	406	113	679	
3T412UH	3.600	500	2.500	500	±100	80-1.580	260-1.760	1.330	50	150	235	1.200	3	152	397	117	698	
3T412UH	3.600	500	2.500	500	±100	80-1.710	260-1.890	1.460	50	150	235	1.200	3	152	391	120	710	
4,5T412UH	5.000	500	3.200	600	±100	40-1.540	220-1.720	1.460	60	150	240	1.200	3	188	370	142	895	
5T412UH	6.200	600	3.500	600	±160	100-1.730	280-1.910	1.550	70	150	240	1.200	4	176	343	201	1.060	



Qualities:

- Low lost load centre - excellent residual capacity
- Very good visibility conditions
- Low entry measurements required
- Simple assembly
- Independent sideshift serially
- Different kinds of equalising buffers on offer
- Load Backrest optionally



- HG = Rubber coating \varnothing 75mm, HV = Polyurethane coating \varnothing 75mm, HV-Q = Square Polyurethane buffers 75 x 75mm, HS = steel disc \varnothing 60mm, HS-Q = Square steel buffers 80 x 80mm
- Length G depends on the number of pistons (): available arm length 937 (11), 1.019 (12), 1.101 (13), 1.183 (14), 1.265 (15)
- Also available without sideshift, model T402UH
- Available with cylinder- and sideshift protection upon request
- Load Backrest see model T179.

Product Images

