


Block Clamp T412V-3

with independent sideshift - with mechanical equilibration plates with Vulcollan coating - 2 hydraulic functions

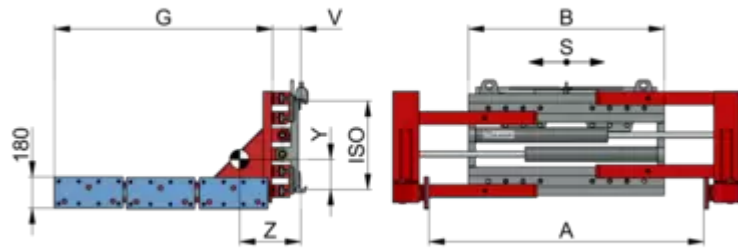

Specification:

KAUP Block Clamps T412V-3 are fitted with clamping arms with especially large mechanical equilibration plates with Vulcollan coating. This attachment is particularly suited for handling large blocks or packets of blocks with plane surfaces and high dimensional stability.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. ± 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment can be fitted with load backrest model T479. The load backrest model T479.1 is suitable for fork positioners T160B and T466B up to 4.8T.



Attachment is available with cylinder and sideshifter protection.



Attachment is designed with toe-in on the tips which should be taken into account when choosing the opening range.



Block Clamp T412V-3

Technical specifications

Model											
2T412V-3	2.000	500	±100	275-1.575	1.130	1.260	2	143	365	160	560
2T412V-3	2.000	500	±100	275-1.575	1.130	1.260	3	143	365	160	560
3T412V-3	2.500	500	±100	295-1.595	1.130	1.260	3	152	338	176	630



Qualities:

- Mechanical equalisation
- Low lost load centre - excellent residual capacity
- Very good visibility conditions
- Independent sideshift serially
- Load Backrest optionally



- Available with cylinder- and sideshift protection upon request
- Also available without sideshift, model T402V-3
- Variations in arm dimensions upon request.
- Load Backrest see model T179.

Product Images

