


## Bucket Discharging Device T167C

hydraulically operated for drop bottom buckets - 1 hydraulic function

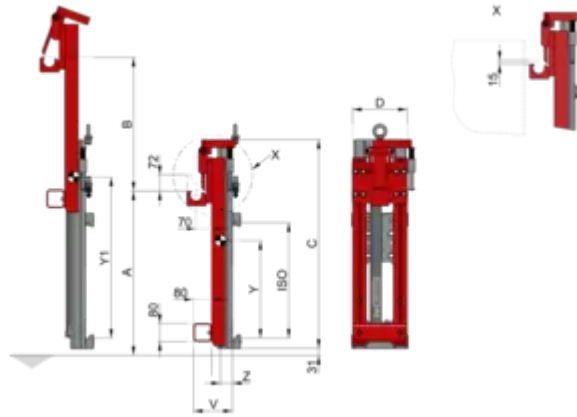

### Specification:

The metal industry is a typical application area for KAUP Bucket Discharging Devices type T167C. This attachment is often used for the transportation of drop-bottom containers which are hydraulically opened.

The Bucket Discharging Device can be mounted directly on the fork carriage between the existing forks. They are often combined with a KAUP Fork Positioner.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires one additional hydraulic function.



# Bucket Discharging Device T167C

## Technical specifications

| Model  |       |     |       |     |   |     |    |     |       |
|--------|-------|-----|-------|-----|---|-----|----|-----|-------|
| 2T167C | 1.500 | 725 | 920   | 242 | 2 | 171 | 55 | 95  | 590   |
| 2T167C | 1.500 | 725 | 920   | 242 | 3 | 171 | 55 | 95  | 590   |
| 3T167C | 2.500 | 715 | 970   | 242 | 2 | 181 | 59 | 118 | 650   |
| 3T167C | 2.500 | 715 | 970   | 242 | 3 | 181 | 59 | 118 | 650   |
| 4T167C | 3.500 | 730 | 1.320 | 283 | 3 | 196 | 62 | 210 | 1.050 |



## Qualities:

- Low weight
- Low lost load centre



## Product Images

