


Carton Clamp T413G-1L

with independent sideshift –

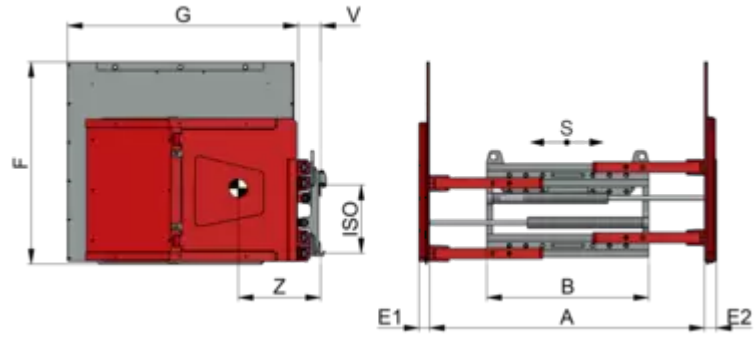

Specification:

The KAUP Carton Clamp T413G-1L is used where white and brown product as well as other wide loading property is used. On account of his very slender arms this attachment is suited particularly for the truck and container loading.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. ± 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is available with Smart Load Control (SLC), an autonomous system for controlling the clamp force. The required pressures are always adjusted autonomously depending on the load.



Attachment can be fitted with load backrest model T479. The load backrest model T479.1 is suitable for fork positioners T160B and T466B up to 4.8T.



Attachment can be fitted with different types of contact pad surfaces specifically suited to the application.



Attachment is available with automatic pressure adjustment.



Attachment is designed with toe-in on the tips which should be taken into account when choosing the opening range.



Carton Clamp T413G-1L

Technical specifications

Model													
1,5T413G-1L	1.250	500	±100	475-1.655	970	63	55	1.000	1.000	2	133	340	423
1,5T413G-1L	1.250	500	±100	475-1.655	970	63	55	1.000	1.200	2	133	396	463
1,5T413G-1L	1.250	500	±100	475-1.655	970	63	55	1.200	1.200	2	133	467	527
1,5T413G-1L	1.250	500	±100	475-1.655	970	63	55	1.200	1.380	2	133	487	575
1,5T413G-1L	1.250	500	±100	325-1.425	1.040	63	55	1.000	1.000	2	133	339	425
1,5T413G-1L	1.250	500	±100	325-1.425	1.040	63	55	1.000	1.200	2	133	395	465
1,5T413G-1L	1.250	500	±100	325-1.425	1.040	63	55	1.200	1.200	2	133	466	529
1,5T413G-1L	1.250	500	±100	325-1.425	1.040	63	55	1.200	1.380	2	133	486	577
1,5T413G-1L	1.250	500	±100	405-1.585	1.040	63	55	1.000	1.000	2	133	339	425
1,5T413G-1L	1.250	500	±100	405-1.585	1.040	63	55	1.000	1.200	2	133	395	465
1,5T413G-1L	1.250	500	±100	405-1.585	1.040	63	55	1.200	1.200	2	133	466	529
1,5T413G-1L	1.250	500	±100	405-1.585	1.040	63	55	1.200	1.380	2	133	486	577
1,5T413G-1L	1.250	500	±100	485-1.835	1.130	63	55	1.000	1.000	2	133	336	435
1,5T413G-1L	1.250	500	±100	485-1.835	1.130	63	55	1.000	1.200	2	133	392	475
1,5T413G-1L	1.250	500	±100	485-1.835	1.130	63	55	1.200	1.200	2	133	462	539
1,5T413G-1L	1.250	500	±100	485-1.835	1.130	63	55	1.200	1.380	2	133	481	587
1,5T413G-1L	1.250	500	±100	465-1.865	1.200	63	55	1.000	1.000	2	133	335	444
1,5T413G-1L	1.250	500	±100	465-1.865	1.200	63	55	1.000	1.200	2	133	390	484
1,5T413G-1L	1.250	500	±100	465-1.865	1.200	63	55	1.200	1.200	2	133	460	548

Model													
1,5T413G-1L	1.250	500	±100	465-1.865	1.200	63	55	1.200	1.380	2	133	479	596
2T413G-1L	2.000	500	±100	520-1.720	970	63	60	1.000	1.000	2	143	332	493
2T413G-1L	2.000	500	±100	520-1.720	970	63	60	1.000	1.000	3	143	332	493
2T413G-1L	2.000	500	±100	520-1.720	970	63	60	1.000	1.200	3	143	392	538
2T413G-1L	2.000	500	±100	520-1.720	970	63	60	1.200	1.200	3	143	423	602
2T413G-1L	2.000	500	±100	520-1.720	970	63	60	1.200	1.380	3	143	476	659
2T413G-1L	2.000	500	±100	550-1.850	1.040	63	60	1.000	1.000	3	143	330	498
2T413G-1L	2.000	500	±100	550-1.850	1.040	63	60	1.000	1.200	3	143	390	543
2T413G-1L	2.000	500	±100	550-1.850	1.040	63	60	1.200	1.200	3	143	421	607
2T413G-1L	2.000	500	±100	550-1.850	1.040	63	60	1.200	1.380	3	143	474	664
2T413G-1L	2.000	500	±100	460-1.760	1.130	63	60	1.000	1.000	3	143	328	503
2T413G-1L	2.000	500	±100	460-1.760	1.130	63	60	1.000	1.200	3	143	387	548
2T413G-1L	2.000	500	±100	460-1.760	1.130	63	60	1.200	1.200	3	143	418	612
2T413G-1L	2.000	500	±100	460-1.760	1.130	63	60	1.200	1.380	3	143	471	669
2T413G-1L	2.000	500	±100	460-1.960	1.330	63	60	1.000	1.000	3	143	314	527
2T413G-1L	2.000	500	±100	460-1.960	1.330	63	60	1.000	1.200	3	143	373	572
2T413G-1L	2.000	500	±100	460-1.960	1.330	63	60	1.200	1.200	3	143	404	636
2T413G-1L	2.000	500	±100	460-1.960	1.330	63	60	1.200	1.380	3	143	457	693
2T413G-1L	2.000	500	±100	570-2.370	1.520	63	60	1.000	1.000	3	143	307	551
2T413G-1L	2.000	500	±100	570-2.370	1.520	63	60	1.000	1.200	3	143	366	596
2T413G-1L	2.000	500	±100	570-2.370	1.520	63	60	1.200	1.200	3	143	397	660
2T413G-1L	2.000	500	±100	570-2.370	1.520	63	60	1.200	1.380	3	143	450	717
2T413G-1L	2.000	500	±100	520-1.720	970	63	60	1.000	1.200	2	143	392	538

Model													
2T413G-1L	2.000	500	±100	520-1.720	970	63	60	1.200	1.200	2	143	423	602
2T413G-1L	2.000	500	±100	520-1.720	970	63	60	1.200	1.380	2	143	476	659
2T413G-1L	2.000	500	±100	550-1.850	1.040	63	60	1.000	1.000	2	143	330	498
2T413G-1L	2.000	500	±100	550-1.850	1.040	63	60	1.000	1.200	2	143	390	543
2T413G-1L	2.000	500	±100	550-1.850	1.040	63	60	1.200	1.200	2	143	421	607
2T413G-1L	2.000	500	±100	550-1.850	1.040	63	60	1.200	1.380	2	143	474	664
2T413G-1L	2.000	500	±100	460-1.760	1.130	63	60	1.000	1.000	2	143	328	503
2T413G-1L	2.000	500	±100	460-1.760	1.130	63	60	1.000	1.200	2	143	387	548
2T413G-1L	2.000	500	±100	460-1.760	1.130	63	60	1.200	1.200	2	143	418	612
2T413G-1L	2.000	500	±100	460-1.760	1.130	63	60	1.200	1.380	2	143	471	669
2T413G-1L	2.000	500	±100	460-1.960	1.330	63	60	1.000	1.000	2	143	314	527
2T413G-1L	2.000	500	±100	460-1.960	1.330	63	60	1.000	1.200	2	143	373	572
2T413G-1L	2.000	500	±100	460-1.960	1.330	63	60	1.200	1.200	2	143	404	636
2T413G-1L	2.000	500	±100	460-1.960	1.330	63	60	1.200	1.380	2	143	457	693
2T413G-1L	2.000	500	±100	570-2.370	1.520	63	60	1.000	1.000	2	143	307	551
2T413G-1L	2.000	500	±100	570-2.370	1.520	63	60	1.000	1.200	2	143	366	596
2T413G-1L	2.000	500	±100	570-2.370	1.520	63	60	1.200	1.200	2	143	397	660
2T413G-1L	2.000	500	±100	570-2.370	1.520	63	60	1.200	1.380	2	143	450	717



Qualities:

- Low lost load - very good residual capacities
- Very good visibility conditions
- Very slender clamp arms
- Independent sideshift serially
- Load backrest optionally



- Add-on price for 100mm armlength / -height on request,
- Option: with automatic pressure switching (sensor technology) or attachment available with Smart Load Control (SLC), an autonomous system for controlling the clamp force (models 2T after design adaptation).
- For contact pad coatings see accessories in the pricelist.
- Also available with 2 contact pads on the swivelling arm - model T413G-2L / T403G-2L.
- Also available without sideshift, model T403G-1L
- Load Backrest see model T179.

Product Images

