


## Double Sideshifter T252B

2 hydraulic functions

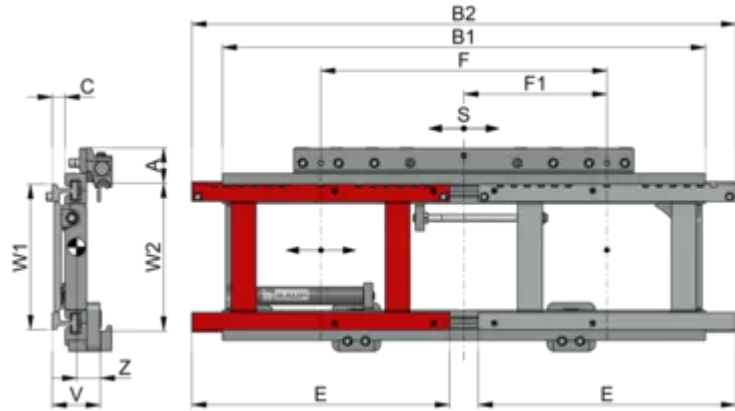

### Specification:

The Double Sideshifter T252B is a part of the KAUP Multiple Sideshifter product range. This attachment extends the operation of every forklift truck as the Double Sideshifter can simultaneously pick up two transport units.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



Attachment can be fitted with load backrest model T179.



Please note the additional information below the data table.



## Double Sideshifter T252B

### Technical specifications

| Model      |       |       |   |   |     |       |     |           |     |      |     |    |     |     |       |    |
|------------|-------|-------|---|---|-----|-------|-----|-----------|-----|------|-----|----|-----|-----|-------|----|
| 2T252B-L   | 1.250 | 600   | 2 | 2 | 98  | 1.520 | 720 | 800-1.000 | 400 | ±100 | 138 | 66 | 232 | 187 | 1.350 | 36 |
| 2T252B-Q   | 1.250 | 600   | 2 | 2 | 98  | 1.780 | 800 | 980-1.300 | 580 | ±100 | 138 | 67 | 230 | 203 | 1.550 | 36 |
| 3T252B-L   | 1.750 | 600   | 2 | 3 | 85  | 1.520 | 720 | 800-1.000 | 400 | ±100 | 138 | 64 | 255 | 219 | 1.350 | 36 |
| 3T252B-Q   | 1.750 | 600   | 2 | 3 | 85  | 1.780 | 800 | 980-1.300 | 580 | ±100 | 138 | 66 | 251 | 237 | 1.550 | 36 |
| 4,5T252B-L | 2.000 | 600   | 2 | 3 | 85  | 1.520 | 720 | 800-1.000 | 400 | ±100 | 148 | 66 | 260 | 274 | 1.350 | 36 |
| 4,5T252B-Q | 2.000 | 600   | 2 | 3 | 85  | 1.780 | 800 | 980-1.300 | 580 | ±100 | 148 | 67 | 259 | 297 | 1.550 | 36 |
| 4,5T252B-Q | 2.000 | 600   | 2 | 3 | 85  | 1.960 | 980 | 980-1.260 | 490 | ±100 | 148 | 69 | 256 | 314 | 1.650 | 36 |
| 5T252B-L   | 2.750 | 600   | 3 | 4 | 118 | 1.520 | 720 | 800-1.000 | 400 | ±100 | 153 | 72 | 320 | 339 | 1.460 | 41 |
| 5T252B-Q   | 2.750 | 600   | 3 | 4 | 118 | 1.780 | 800 | 980-1.300 | 580 | ±100 | 153 | 73 | 317 | 355 | 1.550 | 41 |
| 6T252B-L   | 2.000 | 1.200 | 4 | 4 | 135 | 1.520 | 720 | 800-1.000 | 400 | ±160 | 178 | 80 | 363 | 412 | 1.460 | 56 |
| 6T252B-Q   | 2.000 | 1.200 | 4 | 4 | 135 | 1.780 | 800 | 980-1.300 | 580 | ±160 | 178 | 81 | 360 | 436 | 1.600 | 56 |



## Qualities:

- Very good residual capacity
- Good visibility conditions
- SMOOTHROLL- bottom hooks with compact rollers serially



- L = Pallet handling lengthwise / Q = Pallet handling crosswise
- Forks see model T180.
- Please observe necessary fork shank under-clearance.
- Capacities of 3T upwards with SOFTSTOP end-of-stroke slow-down.
- Higher capacities and other construction widths available upon request
- Load Backrest see model T179.

## Product Images

