


Foam Rubber Clamp T413R

with independent sideshift - 2 hydraulic functions

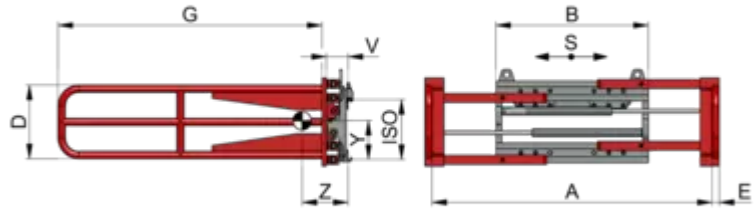

Specification:

The easiest way to transport non-palletised bales of foam rubber or styrofoam is with clamps in the T413R range designed with high visibility. The Foam Rubber Clamp has the same high qualities of all KAUP clamps: variability, stability, reliability.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. ± 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment can be fitted with load backrest model T479. The load backrest model T479.1 is suitable for fork positioners T160B and T466B up to 4.8T.



Attachment is designed with toe-in on the tips which should be taken into account when choosing the opening range.



Foam Rubber Clamp T413R

Technical specifications

Model													
1,5T413R	500	1.000	±100	760-2.260	1.130	500	50	1.500	2	133	266	263	348
1,5T413R	500	1.000	±100	840-2.460	1.330	500	50	1.500	2	133	259	262	362
1,5T413R	500	1.000	±100	840-2.460	1.330	500	50	1.800	2	133	304	262	372
2T413R	800	1.000	±100	600-1.900	1.040	500	50	1.800	2	143	313	263	377
2T413R	800	1.000	±100	600-2.450	1.600	500	50	1.800	2	143	279	263	438



Qualities:

- Excellent price-performance ratio
- Good visibility conditions
- Solid strengthened design with KAUP clamp profiles from T-profiles and C-profiles
- Strong tube design
- Independent sideshift serially
- Customer specified modifications feasible



- Variations in width, opening ranges and arm dimensions available upon request.
- Also available without sideshift, model T403R
- Load Backrest see model T179.

Product Images

