


Fork Positioner, integrated T411 BZI

with valveblock sideshift, dependent on opening range – 2 hydraulic functions

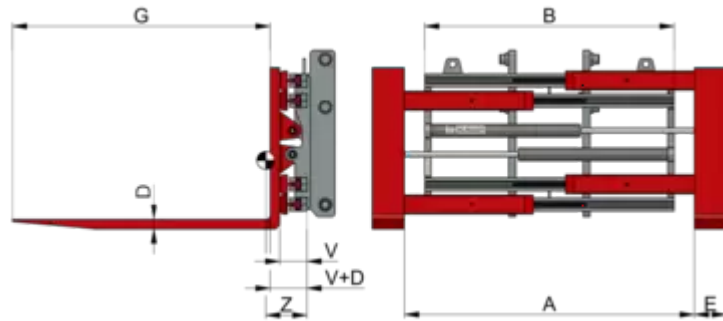

Specification:

The KAUP integrated Fork Positioner T411BZI is a robust attachment with very large opening ranges suitable for exceptionally heavy duty operation - ideal for uneven surfaces. The construction gives an optimal view to the fork tips. The residual capacity is, due to the integration in the mast of the forklift truck, higher than the T411BZ range.



Attachment has valveblock sideshift serially (integrated sideshift). Its design means that sideshift stroke is not available when the forks or arms are completely opened and/or completely closed.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is available for operation in explosion hazardous areas.



Attachment can be fitted with load backrest model T179.



Attachment is specially designed for the function fork positioning and is not suitable for clamping between the forks.



Attachment is available with cylinder and sideshifter protection.



Please note the additional information below the data table.



Attachment is designed with toe-in on the tips which should be taken into account when choosing the opening range.



Fork Positioner, integrated T411 BZI

Technical specifications

Model											
4T411BZI	4.500	500	330-2.530	2.030	60	120	1.200	±550	139	138	848
5T411BZI	6.300	600	220-1.850	1.550	60	150	1.200	±407,5	159	193	840
5T411BZI	6.300	600	180-2.080	1.860	60	150	1.200	±475	159	185	902
5T411BZI	6.300	600	380-2.480 ¹⁾	1.860	60	150	1.200	±525	159	185	906
5T411BZI	6.300	600	310-2.510 ¹⁾	2.030	60	150	1.200	±550	159	181	936
6T411BZI	8.000	600	170-1.800	1.550	60	200	1.200	±407,5	169	223	1.057
6T411BZI	8.000	600	130-2.030	1.860	60	200	1.200	±475	169	216	1.117
6T411BZI	8.000	600	330-2.430 ¹⁾	1.860	60	200	1.200	±525	169	215	1.121
6T411BZI	8.000	600	200-3.800 ¹⁾	3.390	50	300	1.200	±900	169	208	1.437
8T411BZI	8.000	900	330-2.530 ¹⁾	2.000	70	200	1.200	±550	188	199	1.424
8T411BZI	8.000	900	400-2.900 ¹⁾	2.400	70	200	1.200	±625	188	191	1.532



Qualities:

- Very large opening ranges
- Valve block sideshift - dependent on opening range - serially
- Screw-on forks optional



- 1) Transport of europallets lengthwise not possible.
- CofG and weight measurements do not take the cheek plates into account.
- Fork carriage drawings, roller studs and chain anchors to be supplied by customer if necessary.
- Not suitable for clamping between the forks.
- with screw-on forks available upon request: T411BZIA
- Load Backrest see model T179.
- Also available without sideshift, model T401BZI

Product Images

