


Fork Positioner, integrated T466 BIZ

with independent sideshift - 2 hydraulic functions

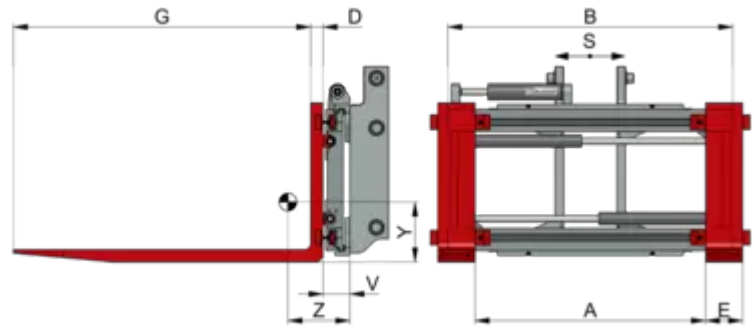

Specification:

The KAUP integrated Fork Positioner T466BIZ (A) has been specially designed with optimised visibility and residual capacity. Compared to hook-on Fork Positioners in the T466 range with even better, higher residual capacities this attachment is manufactured from well proven components and is suitable for moderately heavy duty tasks. The qualities of the range of T466BIZ (A) Fork Positioners are particularly effective when different sizes of loads are regularly transported or different kinds of transportation are used - for example in logistics.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. ± 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



Attachment can be fitted with load backrest model T479. The load backrest model T479.1 is suitable for fork positioners T160B and T466B up to 4.8T.



Attachment is available for operation in explosion hazardous areas.



Attachment is specially designed for the function fork positioning and is not suitable for clamping between the forks.



Fork Positioner, integrated T466 BIZ

Technical specifications

Model												
1,5T466BIZ	1.600	500	170-870	1.040	40	100	1.200	±100	108	236	218	249
1,5T466BIZ	1.600	500	170-970	1.150	40	100	1.200	±100	108	231	220	256
2T466BIZ	2.500	500	130-830	1.040	45	120	1.200	±100	108	275	204	284
2T466BIZ	2.500	500	130-930	1.150	45	120	1.200	±100	108	269	206	291
2,5T466BIZ	2.500	600	130-830	1.040	50	120	1.200	±100	108	282	202	298
2,5T466BIZ	2.500	600	130-930	1.150	50	120	1.200	±100	108	277	203	305
3,5T466BIZ	3.500	500	130-930	1.150	50	150	1.200	±100	108	295	228	353
3,5T466BIZ	3.500	500	130-1.130	1.350	50	150	1.200	±100	108	279	234	377
4,5T466BIZ	5.000	500	130-1.130	1.350	60	150	1.200	±100	121	262	249	485
4,5T466BIZ	5.000	500	130-1.310	1.550	60	150	1.200	±100	121	246	255	525
4,8T466BIZ ¹⁾	5.000	600	130-1.130	1.350	60	150	1.200	±100	121	262	249	485
4,8T466BIZ ¹⁾	5.000	600	130-1.310	1.550	60	150	1.200	±100	121	246	255	525
6T466BIZ	6.000	600	200-1.200	1.460	70	150	1.200	±100	145	263	341	649
6T466BIZ	6.000	600	200-1.400	1.650	70	150	1.200	±160	145	244	365	709
6T466BIZ	6.000	600	200-1.600	1.860	70	150	1.200	±160	145	234	368	747
8T466BIZ	8.000	600	200-1.600	1.860	70	150	1.200	±160	145	234	368	747
8T466BIZ	8.000	600	200-1.800	2.060	70	150	1.200	±160	145	224	373	791
8T466BIZ	8.000	600	200-2.000	2.260	70	150	1.200	±160	145	218	376	821
8T466BIZ	8.000	600	210-2.060	2.400	70	150	1.200	±160	145	212	379	852

Model												
10T466BIZ	8.000	900	160-1.790	2.060	70	200	1.200	±160	211	244	374	1.230
10T466BIZ	8.000	900	160-1.960	2.260	70	200	1.200	±160	211	235	377	1.298
10T466BIZ	8.000	900	160-2.060	2.400	70	200	1.200	±160	211	231	379	1.335
10T466BIZ	8.000	1.100	160-1.790	2.060	80	200	1.200	±160	211	254	370	1.280
10T466BIZ	8.000	1.100	160-1.960	2.260	80	200	1.200	±160	211	245	373	1.347
10T466BIZ	8.000	1.100	160-2.060	2.400	80	200	1.200	±160	211	241	375	1.385



Qualities:

- For moderately heavy operation - complete program with capacities of up to 10 tons
- Very good residual capacity
- Excellent visibility
- Supplied with welded forks
- Supplied optionally with screw on forks for wear intensive operation (A-version)
- Independent sideshift serially



- 1) 4,8T with capacity (kg/mm) 2.700/1.200 available upon request.
- CofG and weight measurements do not take the cheek plates into account.
- Fork carriage drawings, roller studs and chain anchors to be supplied by customer if necessary.
- Not suitable for clamping between the forks.
- Load backrest see model T479 and T479.1
- Larger models and different widths available upon request.
- with screw-on forks available upon request: BIZA-Version

Product Images

