


Fork Positioner T156

with independent sideshift - without
forks - for forks acc. to ISO 2330 - 2
hydraulic functions

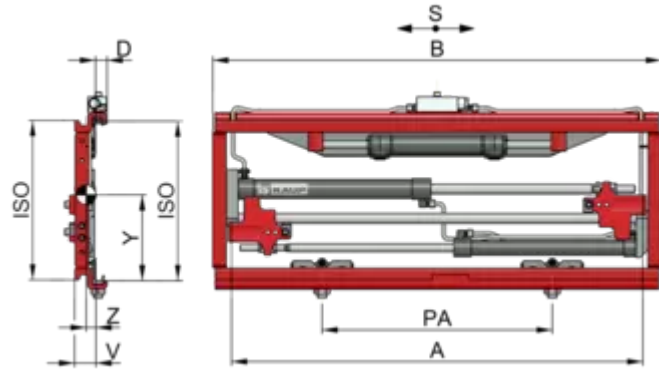

Specification:

The Fork Positioner T156 is the starter series of KAUP Fork Positioners. This attachment with excellent price-performance ratio is designed with hydraulic parallel movement with two cylinders and is based on the P4-Sideshifter.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. ± 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



Attachment can be fitted with load backrest model T173.



Attachment is specially designed for the function fork positioning and is not suitable for clamping between the forks.



Fork Positioner T156

Technical specifications

Model													
2T156B	2.500	500	±100	290-795	890	28	590	70-125	2	55	23	217	60
2T156B	2.500	500	±100	290-885	980	28	590	70-125	2	55	22	217	63
2T156B	2.500	500	±100	310-945	1.040	28	590	70-125	2	55	22	216	66
2T156B	2.500	500	±100	295-1055	1.150	28	590	70-125	2	55	22	215	70
4,5T156	5.000	500	±100	355-1055	1.150	40	600	100-150	3	82	39	265	136
4,5T156	5.000	500	±100	355-1255	1.350	40	600	100-150	3	82	40	265	152



Qualities:

- Excellent price-performance ratio
- For light duty operation
- Hydraulic parallel movement
- Independent sideshift
- Original forklift trucks useable
- Optional: without sideshift



- Not suitable for clamping between the forks.
- Forks see model T180.
- The original forks of the forklift truck, up to length of 1,800 mm, can be used.
- Load backrest see model T173

Product Images



4.5T156