


Fork Positioner T410Z

with independent sideshift

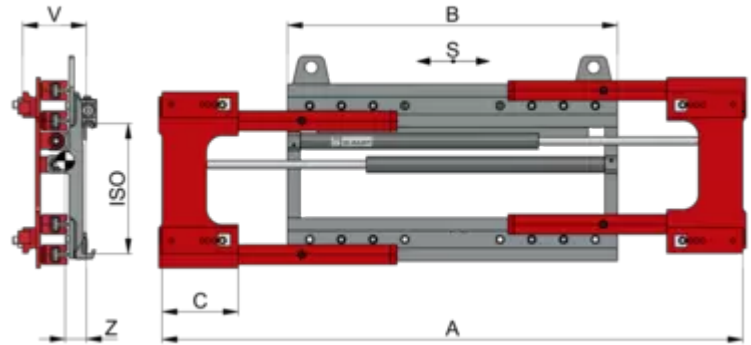

Specification:

The robust KAUP Fork Positioner T410Z is the alternative to Fork Positioner T466B when a large opening range is required on a small construction width. This attachment is ideal for heavy duty operation and is supplied without forks. Numerous individual configurations are possible.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. ± 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires one additional hydraulic function.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



Attachment can be fitted with load backrest model T479. The load backrest model T479.1 is suitable for fork positioners T160B and T466B up to 4.8T.



Attachment is available for operation in explosion hazardous areas.



Attachment is specially designed for the function fork positioning and is not suitable for clamping between the forks.



Attachment is available with cylinder and sideshifter protection.



Attachment is designed with toe-in on the tips which should be taken into account when choosing the opening range.



Fork Positioner T410Z

Technical specifications

Model										
1T410Z	1.500	500	±100	540-1.500	750	240	2	183	88	173
1T410Z	1.500	500	±100	540-1.720	970	240	2	183	87	196
1T410Z	1.500	500	±100	550-1.900	1.130	240	2	183	87	206
1T410Z	1.500	500	±100	530-1.930	1.200	240	2	183	86	211
1,6T410Z	2.300	500	±100	530-1.710	1.040	240	2	188	84	225
1,6T410Z	2.300	500	±100	560-1.860	1.130	240	2	188	84	231
1,6T410Z	2.300	500	±100	560-2.060	1.330	240	2	188	84	244
1,6T400Z	2.300	500	-	540-1540	850	240	2	181	82	209
2,5T410Z	2.800	500	±100	530-1.710	1.040	240	2	198	90	240
2,5T410Z	2.800	500	±100	560-1.860	1.130	240	2	198	89	246
2,5T410Z	2.800	500	±100	560-2.060	1.330	240	2	198	88	259
2,5T400Z	2.800	500	-	540-1540	850	240	2	191	87	222
2,5T410Z	3.000	500	±100	560-1.860	1.130	240	3	203	90	248
2,5T410Z	3.000	500	±100	560-2.060	1.330	240	3	203	89	261
3T410Z	3.600	500	±100	560-1.860	1.130	240	2	223	95	374
3T410Z	3.600	500	±100	560-1.860	1.130	240	3	223	95	374
3T410Z	3.600	500	±100	560-2.060	1.330	240	3	223	94	392
3T410Z	3.600	500	±100	550-2.170	1.460	240	3	223	94	403
3T410Z	3.600	500	±100	560-2.060	1.330	240	2	223	94	392

Model										
3T410Z	3.600	500	±100	550-2.170	1.460	240	2	223	94	403
4T410Z	4.150	500	±100	560-1.860	1.130	240	3	233	100	420
4T410Z	4.150	500	±100	560-2.060	1.330	240	3	233	99	440
4T410Z	4.150	500	±100	550-2.170	1.460	240	3	233	99	452
4,5T410Z	5.000	500	±100	580-1.930	1.200	240	3	258	114	483
4,5T410Z	5.000	500	±100	540-1.980	1.330	240	3	258	113	499
4,5T410Z	5.000	500	±100	570-2.170	1.460	240	3	258	112	515
4,5T410Z	5.000	500	±100	580-2.280	1.550	240	3	258	112	526
4,8T410Z	5.000	600	±100	580-1.930	1.200	240	3	253	113	487
4,8T410Z	5.000	600	±100	540-1.980	1.330	240	3	253	112	501
4,8T410Z	5.000	600	±100	570-2.170	1.460	240	3	253	111	517
4,8T410Z	5.000	600	±100	580-2.280	1.550	240	3	253	111	527
5T410Z	6.200	600	±160	530-2.160	1.550	260	4	260	99	610
5T410Z	6.200	600	±160	800-2.700 ¹⁾	1.550	260	4	260	102	670
5T410Z	6.200	600	±160	530-2.430	1.820	260	4	260	99	643



Qualities:

- Strengthened design
- Good residual capacity
- Independent sideshift serially
- Original forks or Telescopic Forks can be used



- 1) Transport of europallets lengthwise not possible.
- Not suitable for clamping between the forks.
- Forks see model T180.
- Also available without sideshift, model T400Z
- Fork Positioner with cylinder- and sideshift protection upon request.
- Load Backrest see model T179.

Product Images

