


Forks T180.2

Version with strengthened lower
brackets - for rotating units

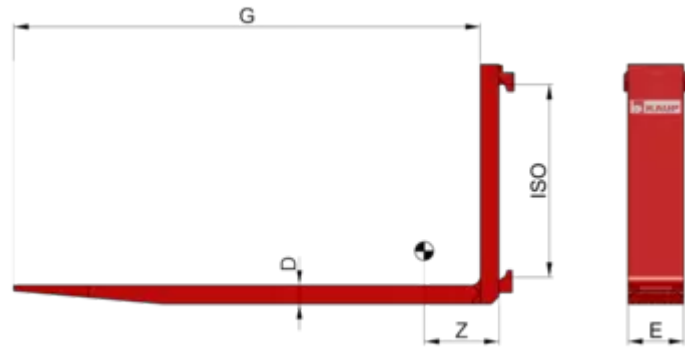

Specification:

The Forks T180.2 of KAUP are a variation of the standard hook-on forks with ISO suspension to the admission and the transport of palettised load.

Technical specifications

Model									
2T180.2	1.950	500	80	40	1.000	2	294	38	2,5
2T180.2	1.950	500	80	40	1.100	2	336	41	2,5
2T180.2	1.950	500	80	40	1.150	2	358	42	2,5
2T180.2	1.950	500	80	40	1.200	2	380	43	2,5
2,5T180.2	2.500	500	100	40	1.000	2	294	48	3,1
2,5T180.2	2.500	500	100	40	1.100	2	336	51	3,1
2,5T180.2	2.500	500	100	40	1.150	2	358	53	3,1
2,5T180.2	2.500	500	100	40	1.200	2	380	54	3,1
2,5T180.2	2.500	500	100	40	1.400	2	422	60	3,1
2,5T180.2	2.500	500	100	40	1.600	2	510	67	3,1
2,5T180.2	2.500	600	120	40	1.000	2	294	57	3,8
2,5T180.2	2.500	600	120	40	1.100	2	336	61	3,8
2,5T180.2	2.500	600	120	40	1.150	2	358	63	3,8
2,5T180.2	2.500	600	120	40	1.200	2	380	65	3,8
2,5T180.2	2.500	600	120	40	1.400	2	422	72	3,8
2,5T180.2	2.500	600	120	40	1.600	2	510	80	3,8
2,5T180.2	2.500	600	120	40	1.800	2	601	87	3,8
2,5T180.2	2.500	600	120	40	2.000	2	693	95	3,8
3T180.2	3.000	500	100	45	1.000	3	286	58	3,5

Model									
3T180.2	3.000	500	100	45	1.100	3	327	62	3,5
3T180.2	3.000	500	100	45	1.150	3	348	63	3,5
3T180.2	3.000	500	100	45	1.200	3	369	65	3,5
3T180.2	3.000	500	100	45	1.400	3	417	72	3,5
3T180.2	3.000	500	100	45	1.600	3	503	79	3,5
3T180.2	3.000	500	100	45	1.800	3	592	86	3,5
3T180.2	3.000	500	100	45	2.000	3	683	93	3,5
4,5T180.2	4.500	500	120	50	1.000	3	281	76	4,7
4,5T180.2	4.500	500	120	50	1.100	3	322	81	4,7
4,5T180.2	4.500	500	120	50	1.150	3	343	83	4,7
4,5T180.2	4.500	500	120	50	1.200	3	364	85	4,7
4,5T180.2	4.500	500	120	50	1.400	3	450	95	4,7
4,5T180.2	4.500	500	120	50	1.600	3	539	104	4,7
4,5T180.2	4.500	500	120	50	1.800	3	630	114	4,7
4,5T180.2	4.500	500	120	50	2.000	3	722	123	4,7
4,5T180.2	4.500	500	120	50	2.200	3	815	132	4,7
4,5T180.2	4.500	500	120	50	2.400	3	909	142	4,7
5T180.2	5.000	600	150	50	1.000	3	281	94	5,9
5T180.2	5.000	600	150	50	1.100	3	322	100	5,9
5T180.2	5.000	600	150	50	1.150	3	343	103	5,9
5T180.2	5.000	600	150	50	1.200	3	364	106	5,9
5T180.2	5.000	600	150	50	1.400	3	450	118	5,9
5T180.2	5.000	600	150	50	1.600	3	539	129	5,9

Model									
5T180.2	5.000	600	150	50	1.800	3	630	141	5,9
5T180.2	5.000	600	150	50	2.000	3	722	153	5,9
5T180.2	5.000	600	150	50	2.200	3	815	165	5,9
5T180.2	5.000	600	150	50	2.400	3	909	177	5,9
7T180.2	7.000	600	150	60	1.200	4	327	135	7,1
7T180.2	7.000	600	150	60	1.400	4	408	149	7,1
7T180.2	7.000	600	150	60	1.600	4	493	163	7,1
7T180.2	7.000	600	150	60	1.800	4	581	178	7,1
7T180.2	7.000	600	150	60	2.000	4	670	192	7,1
7T180.2	7.000	600	150	60	2.200	4	761	206	7,1
7T180.2	7.000	600	150	60	2.400	4	853	220	7,1
9T180.2	9.000	600	150	70	1.200	4	343	160	8,2
9T180.2	9.000	600	150	70	1.400	4	397	176	8,2
9T180.2	9.000	600	150	70	1.600	4	481	193	8,2
9T180.2	9.000	600	150	70	1.800	4	568	209	8,2
9T180.2	9.000	600	150	70	2.000	4	657	226	8,2
9T180.2	9.000	600	150	70	2.200	4	747	242	8,2
9T180.2	9.000	600	150	70	2.400	4	838	258	8,2
12T180.2	12.000	600	200	70	1.200	4	343	215	11,0
12T180.2	12.000	600	200	70	1.400	4	397	237	11,0
12T180.2	12.000	600	200	70	1.600	4	481	259	11,0
12T180.2	12.000	600	200	70	1.800	4	568	281	11,0
12T180.2	12.000	600	200	70	2.000	4	657	303	11,0

Model									
12T180.2	12.000	600	200	70	2.200	4	747	325	11,0
12T180.2	12.000	600	200	70	2.400	4	838	347	11,0
14T180.2	14.600	600	200	80	1.200	4	325	236	12,6
14T180.2	14.600	600	200	80	1.400	4	405	261	12,6
14T180.2	14.600	600	200	80	1.600	4	489	286	12,6
14T180.2	14.600	600	200	80	1.800	4	576	312	12,6
14T180.2	14.600	600	200	80	2.000	4	645	337	12,6
14T180.2	14.600	600	200	80	2.200	4	755	362	12,6
14T180.2	14.600	600	200	80	2.400	4	847	387	12,6



Qualities:

- An easy assembly
- For rotating units
- Numerous different load-carrying capacity and hook-on fork lengths in the program
- Robust implementation



- Higher capacities and specific dimensions and special height of fork shank upon request.
- KAUP Rotator see also T351 or T391.
- The prices are for standard forks acc. to ISO 2328 „A“ or „B“.

Product Images

