


## Load Stabilizer T155ST

Optimized for maximum residual capacity by carriages beside the frame - 2 hydraulic functions

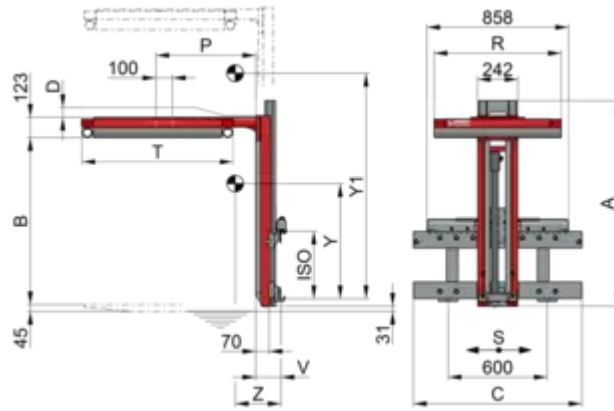

### Specification:

The KAUP Stabilizer with optimised residual capacity has a contact pad frame mounted directly into the fork carriage of the attachment and therefore achieves a low lost load centre. The sideshift stroke allows the driver to compensate inaccuracies.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g.  $\pm 100$  mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



# Load Stabilizer T155ST

## Technical specifications

Model																	
1T155ST	2.500	500	1.240	960-1.970	890	80	605	800	1.000	3.700	2	±100	82	208	577	1.041	236
1T155.1ST	2.500	500	1.240	960-1.770	890	10	605	800	1.000	3.700	2	±100	82	210	567	935	232
1T155.2ST	2.500	500	920	760-1.350	890	10	605	800	1.000	3.700	2	±100	82	221	470	740	214
1T155.3ST	2.500	500	1.495	960-2.170	890	280	605	800	1.000	3.700	2	±100	82	200	623	1.178	251
1T155.4ST	2.500	500	1.240	1.070-2.080	890	10	605	800	1.000	3.700	2	±100	82	207	606	1.072	237
1T155.5ST	2.500	500	1.495	1.200-2.210	890	10	605	800	1.000	3.700	2	±100	82	201	674	1.138	250



## Qualities:

- Solid construction
- Good visibility conditions
- Good residual capacity
- Independent sideshift serially



- The standard contact pad frame is alternatively available in 770 x 920 mm or 800 x 1.000 mm.
- To choose the right fork length please consider 70 mm overhang (see drawing).
- Increased contact pad on request.
- Increased fork carriage widths available upon request.

## Product Images

