


Loading Bucket T184

1 hydraulic function

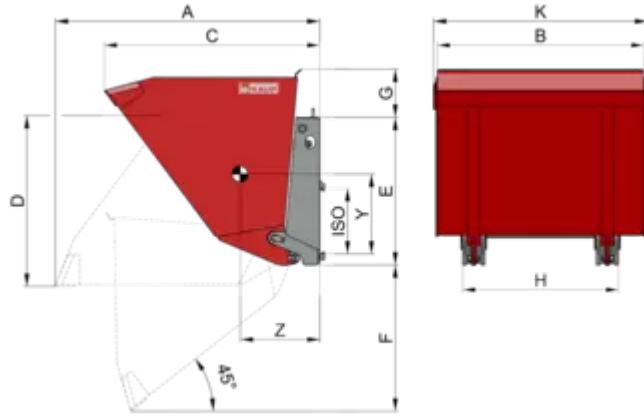

Specification:

The KAUP Loading Bucket T184 is the right choice for transporting loose goods such as sand, gravel, coal, grain, fertilizer, cement, concrete etc. and to overcome heights, e.g. for filling silos. The specific weight of loose goods can vary between 0,75 to/m³ (grain) and 3,5 to/m³ (scrap metal).

This attachment can even be put into use in winter to clear snow or to deposit it.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires one additional hydraulic function.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sidesift upon request.



Loading Bucket T184

Technical specifications

Model																	
2T184.2	1.760	0,8	0,7	1.610	1.300	925	280	1.346	2	830	515	420	530	1.245	955	805	980
2T184.2	1.760	0,8	0,7	1.610	1.300	925	280	1.346	3	830	515	420	530	1.245	955	805	980
2T184.2	2.200	1,0	0,9	1.610	1.650	925	280	1.696	3	830	525	435	590	1.245	955	805	980
2T184.2	2.420	1,1	1,0	1.610	1.800	925	280	1.846	3	830	530	445	615	1.245	955	805	980
2T184.2	2.200	1,0	0,9	1.610	1.650	925	280	1.696	2	830	525	435	590	1.245	955	805	980
2T184.2	2.420	1,1	1,0	1.610	1.800	925	280	1.846	2	830	530	445	615	1.245	955	805	980
3T184.4	2.420	1,1	0,9	1.660	1.300	925	300	1.346	2	830	463	504	560	1.350	1.070	915	980
3T184.4	2.420	1,1	0,9	1.660	1.300	925	300	1.346	3	830	463	504	560	1.350	1.070	915	980
3T184.4	2.640	1,2	1,0	1.660	1.500	925	300	1.546	3	830	474	508	594	1.350	1.070	915	980
3T184.4	2.860	1,3	1,1	1.660	1.650	925	300	1.696	3	830	481	511	620	1.350	1.070	915	980
3T184.4	3.080	1,4	1,2	1.660	1.800	925	300	1.846	3	830	487	514	646	1.350	1.070	915	980
3T184.4	2.640	1,2	1,0	1.660	1.500	925	300	1.546	2	830	474	508	594	1.350	1.070	915	980
3T184.4	2.860	1,3	1,1	1.660	1.650	925	300	1.696	2	830	481	511	620	1.350	1.070	915	980
3T184.4	3.080	1,4	1,2	1.660	1.800	925	300	1.846	2	830	487	514	646	1.350	1.070	915	980
4T184.1	5.000	2,0	1,4	1.780	2.000	1.230	210	2.046	3	890	548	561	835	1.410	1.135	810	1.004
4T184.1	5.000	2,0	1,4	1.780	2.000	1.230	210	2.046	4	890	548	561	835	1.410	1.135	810	1.004
6T184.4	6.600	3,0	2,4	2.250	2.400	1.265	245	2.484	4	1.125	700	595	1.620	1.990	1.370	1.190	1.143
6T184.4	7.920	3,6	2,8	2.250	2.800	1.265	245	2.884	4	1.125	720	603	1.730	1.990	1.370	1.190	1.143



Qualities:

- For heavy duty operation
- Strong, strengthened construction



- 2T,3T and 6T dimensioned for bulk weight up to 2.200 kg/m³. 4T dimensioned for bulk weight up to 2.500 kg/m³

Product Images

