


Pallet Turnover Clamp T451W

Rotation 360° continuous - with two movable fork pairs - 2 hydraulic functions

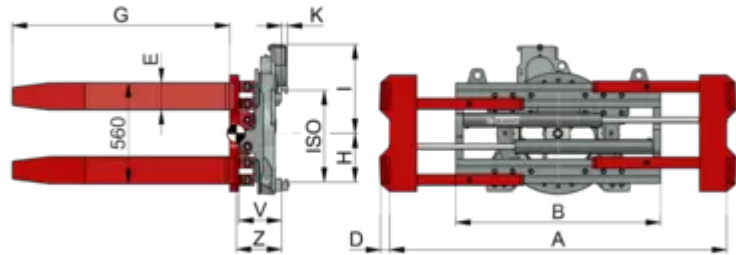

Specification:

The KAUP Pallet Turnover Clamp T451W is an attachment designed with high visibility and suitable for all kinds of applications. It can be used to turn palletised and non-palletised goods or to exchange pallets e.g. from production pallets to transport pallets. It is also suitable for emptying grid boxes or other transport containers.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sideshift upon request.



Attachment is available for operation in explosion hazardous areas.



Attachment is designed with toe-in on the tips which should be taken into account when choosing the opening range.



Attachment is available with cylinder and sideshifter protection.



Pallet Turnover Clamp T451W

Technical specifications

Model																
1,5T451W	1.250	500	540-1.720	970	45	125	1.200	213	478	33	6.013	7,6	2	216	383	531
1,5T451W	1.250	500	530-1.930	1.200	45	125	1.200	213	478	33	6.013	7,6	2	216	376	547
2T451W	2.000	500	560-1.860	1.130	50	150	1.200	269	457	33	7.700	9,7	2	232	385	725
2T451W	2.000	500	560-2.060	1.330	50	150	1.200	269	457	33	7.700	9,7	2	232	381	740
2T451W	2.000	500	560-1.860	1.130	50	150	1.200	269	515	33	7.700	9,7	3	232	385	725
2T451W	2.000	500	560-2.060	1.330	50	150	1.200	269	515	33	7.700	9,7	3	232	381	740
3T451W	2.500	500	560-1.860	1.130	50	150	1.200	338	395	40	8.950	11,3	3	279	373	869
3T451W	2.500	500	560-2.060	1.330	50	150	1.200	338	395	40	8.950	11,3	3	279	369	888
4T451W	2.900	500	560-2.060	1.330	60	160	1.200	338	395	40	8.950	11,3	3	289	380	1.029
4T451W	2.900	500	560-2.190	1.460	60	160	1.200	338	395	40	8.950	11,3	3	289	378	1.041
4,5T451W	2.900	500	560-2.060	1.330	60	160	1.200	328	675	36	14.823	17,4	4	291	364	1.155
4,5T451W	2.900	500	560-2.180	1.460	60	160	1.200	328	675	36	14.823	17,4	4	291	362	1.169
5T451W	3.500	600	580-2.210	1.550	60	200	1.200	345	455	40	13.434	15,7	4	360	412	1.442
5T451W	3.500	600	850-2.750	1.550	60	200	1.200	345	455	40	13.434	15,7	4	360	407	1.505



Qualities:

- Good visibility conditions
- Solid construction
- Rotation 360° endless
- Two double forks serially for secure handling
- Optionally available with sideshift available
- Optionally with lateral supporting plate



- available with additional pair of forks - model T451W/180
- Also available with sideshift, model T491W on request

Product Images

