


## Pallet Turnover Clamp T451W/180

Rotation 360° continuous - with additional pair of forks to empty various boxes - 2 hydraulic functions

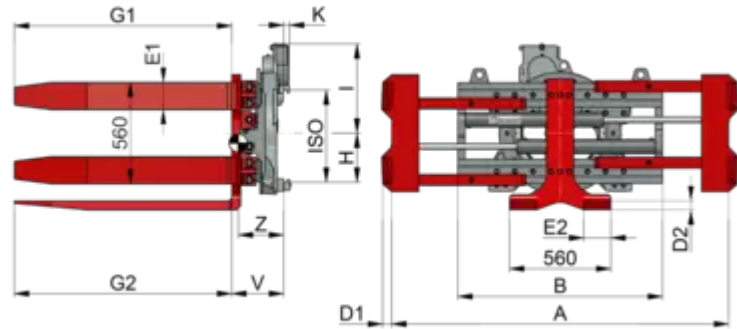

### Specification:

An additional fork pair distinguishes this attachment from the Pallet Turnover Clamp T451. It allows an easy and safe emptying of the most different transport containers or grid boxing with suitable insertion slots.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sideshift upon request.



Attachment is available for operation in explosion hazardous areas.



Attachment is designed with toe-in on the tips which should be taken into account when choosing the opening range.



Attachment is available with cylinder and sideshifter protection.



# Pallet Turnover Clamp T451W/180

## Technical specifications

Model																
1,5T451W/180	1.250	500	540-1.720	970	125	45	1.200	125	6.013	7,6	2B	267	431	678	45	1.200
1,5T451W/180	1.250	500	530-1.930	1.200	125	45	1.200	125	6.013	7,6	2B	267	425	694	45	1.200
2T451W/180	2.000	500	560-1.860	1.130	150	50	1.200	150	7.700	9,7	2B	285	437	905	50	1.200
2T451W/180	2.000	500	560-2.060	1.330	150	50	1.200	150	7.700	9,7	2B	285	432	920	50	1.200
2T451W/180	2.000	500	560-1.860	1.130	150	50	1.200	150	7.700	9,7	3B	285	437	905	50	1.200
2T451W/180	2.000	500	560-2.060	1.330	150	50	1.200	150	7.700	9,7	3B	285	432	920	50	1.200
3T451W/180	2.500	500	560-1.860	1.130	150	50	1.200	150	8.950	11,3	3B	333	423	1.083	50	1.200
3T451W/180	2.500	500	560-2.060	1.330	150	50	1.200	150	8.950	11,3	3B	333	419	1.102	50	1.200



## Qualities:

- Good visibility conditions
- Stable construction
- Rotation 360° endlessly
- Two double forks with additional fork pair serially for safe handling
- Optionally with sideshift available



- Attention: Additional forks exclusively possible with underclearance according to ISO class »B« version
- Note: Container must have suitable insertion slots.
- Also available with sideshift, model T491W/180 on request

## Product Images

