


## Pantograph T149 / T149Z



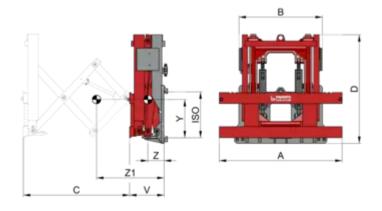

#### **Specification:**

The KAUP Pantograph type T149/T149Z is put into operation whenever Telescopic Forks or Reach Forks cannot be used due to the thickness of the forks. The knife forks of this attachment can pick up loads with very little bottom clearance and stacked double deep for transportation. Additionally the Pantograph T149/T149Z can be combined with a whole range of other KAUP attachments - for example Bale Clamps and Roll Clamps.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires one additional hydraulic function.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sidesift upon request.



Attachment is available for operation in explosion hazardous areas.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



# Pantograph T149 / T149Z

## **Technical specifications**

| Model   | _     |     |       |       |       |       |   |     |     |     |       |
|---------|-------|-----|-------|-------|-------|-------|---|-----|-----|-----|-------|
| 2T149   | 2.000 | 600 | 1.040 | 730   | 950   | 970   | 2 | 310 | 146 | 609 | 450   |
| 2T149   | 2.000 | 600 | 1.040 | 730   | 950   | 970   | 3 | 310 | 146 | 609 | 450   |
| 2T149.1 | 1.200 | 600 | 1.040 | 730   | 1.200 | 1.060 | 2 | 310 | 141 | 711 | 458   |
| 2T149.1 | 1.200 | 600 | 1.040 | 730   | 1.200 | 1.060 | 3 | 310 | 141 | 711 | 458   |
| 3T149   | 3.000 | 600 | 1.150 | 1.130 | 800   | 970   | 3 | 435 | 198 | 565 | 680   |
| 4T149   | 3.500 | 600 | 1.350 | 1.130 | 800   | 970   | 4 | 435 | 189 | 539 | 745   |
| 2T149Z  | 3.000 | 500 | 1.100 | 890   | 620   | 1.170 | 2 | 354 | 149 | 436 | 470   |
| 2T149Z  | 3.000 | 500 | 1.100 | 890   | 620   | 1.170 | 3 | 354 | 149 | 436 | 470   |
| 3T149Z  | 3.500 | 600 | 1.150 | 1.120 | 750   | 1.290 | 3 | 355 | 165 | 519 | 704   |
| 3T149Z  | 3.500 | 600 | 1.150 | 1.120 | 750   | 1.290 | 4 | 355 | 167 | 525 | 697   |
| 8T149Z  | 6.000 | 600 | 1.500 | 1.050 | 1.045 | 1.538 | 4 | 465 | 236 | 741 | 1.320 |



## Pantograph T149 / T149Z



#### **Qualities:**

- Original forks useable
- Solid design
- Sideshift optionally



- 2/3T149Z suitable to attach clamps and multi pallet handlers.
- The capacities are related to the extended pantograph
- Available with sideshift function upon request.
- Max. distance from fork tip to mast = V + C + thickness of FLT carriage + fork lenght.
- Other fork carriage widths available upon request.

#### **Product Images**



