


Push-Pull T144S

with independent sideshift - 2
hydraulic functions

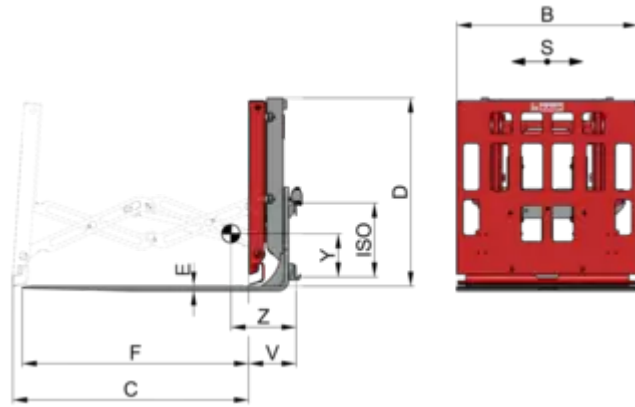

Specification:

Mounted directly on to the fork carriage the KAUP Push-Pull T144S is the right choice when slip-sheets are regularly used as transport mode. Serially fitted sideshift ensures simple and exact positioning of the attachment.

Like all other KAUP Push-Pulls, this range also has a large surfaced carrying plate for transportation of palletless loads.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. ± 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Push-Pull T144S

Technical specifications

Model												
1T144S	1.000	600	1.000	1.300	1.035	20	1.250	±100	2	257	340	545
2T144S	1.700	600	1.000	1.300	1.035	25	1.250	±100	2	262	360	600
2T144S	1.700	600	1.000	1.300	1.035	25	1.250	±100	3	262	360	600
3T144S	2.400	600	1.000	1.300	1.035	30	1.250	±100	3	267	375	665



Qualities:

- Solid construction
- Good visibility conditions through the attachment
- Good residual capacity
- Self supporting scissor system
- Sideshift serially



Product Images