


Rotating Bale Clamp T453

Rotation 360° continuous - 2 hydraulic functions

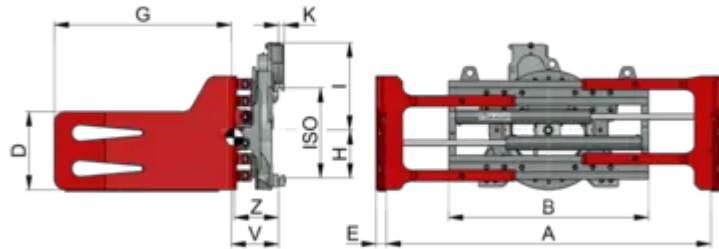

Specification:

The combination with a rotary unit extends the application possibilities of the bale clamp of KAUP even more. Because with the Rotating Bale Clamp T453 the rotating and turning of goods without palettes like cellulose bale, material bale, paper bale, waste paper bale or tobacco bale become easily possible. The insides of the clamp arms of this attachment are optimised for the respective transport purpose. Generally the fixed arms are designed with toe-in.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sideshift upon request.



Attachment is designed with toe-in on the tips which should be taken into account when choosing the opening range.



Attachment is available with cylinder and sideshifter protection.



Rotating Bale Clamp T453

Technical specifications

Model																
1,5T453	1.250	500	475-1.655	970	440	37	1.000	213	478	33	6.013	7,6	2	246	312	462
1,5T453	1.250	500	475-1.725	1.040	440	37	1.000	213	478	33	6.013	7,6	2	246	308	475
1,5T453	1.250	500	465-1.865	1.200	440	37	1.000	213	478	33	6.013	7,6	2	246	305	485
2T453	2.000	500	575-1.875	1.040	440	42	1.000	269	457	32	7.700	9,7	2	266	304	606
2T453	2.000	500	675-2.075	1.040	440	42	1.000	269	457	32	7.700	9,7	2	266	303	609
2T453	2.000	500	485-1.785	1.130	440	42	1.000	269	457	32	7.700	9,7	2	266	303	611
2T453	2.000	500	585-1.985	1.130	440	42	1.000	269	457	32	7.700	9,7	2	266	302	614
2T453	2.000	500	485-1.985	1.330	440	42	1.000	269	457	32	7.700	9,7	2	266	300	627
2T453	2.000	500	595-2.395	1.520	440	42	1.000	269	457	32	7.700	9,7	2	266	291	667
2T453	2.000	500	575-1.875	1.040	440	42	1.000	269	457	32	7.700	9,7	3	266	304	606
2T453	2.000	500	675-2.075	1.040	440	42	1.000	269	457	32	7.700	9,7	3	266	303	609
2T453	2.000	500	485-1.785	1.130	440	42	1.000	269	457	32	7.700	9,7	3	266	303	611
2T453	2.000	500	585-1.985	1.130	440	42	1.000	269	457	32	7.700	9,7	3	266	302	614
2T453	2.000	500	485-1.985	1.330	440	42	1.000	269	457	32	7.700	9,7	3	266	300	627
2T453	2.000	500	595-2.395	1.520	440	42	1.000	269	457	32	7.700	9,7	3	266	291	667
2,5T453	2.300	500	475-1.775	1.130	470	47	1.000	269	457	32	7.700	9,7	2	271	305	703
2,5T453	2.300	500	475-1.975	1.330	470	47	1.000	269	457	32	7.700	9,7	2	271	301	722
2,5T453	2.300	500	475-1.775	1.130	470	47	1.000	269	492	32	7.700	9,7	3	271	305	703
2,5T453	2.300	500	475-1.975	1.330	470	47	1.000	269	492	32	7.700	9,7	3	271	301	722

Model																
3T453	2.500	500	475-1.775	1.130	470	47	1.000	338	395	40	8.950	11,3	3	304	305	814
3T453	2.500	500	475-1.975	1.330	470	47	1.000	338	395	40	8.950	11,3	3	304	303	834
3T453	2.500	500	475-2.105	1.460	470	47	1.000	338	395	40	8.950	11,3	3	304	301	845
4T453	2.900	500	375-1.775	1.330	470	47	1.000	338	395	40	8.950	11,3	3	314	299	870
4T453	2.900	500	475-1.975	1.330	470	47	1.000	338	395	40	8.950	11,3	3	314	299	872
4T453	2.900	500	605-2.235	1.330	470	47	1.000	338	395	40	8.950	11,3	3	314	299	875
4T453	2.900	500	475-2.105	1.460	470	47	1.000	338	395	40	8.950	11,3	3	314	297	885
4T453	2.900	500	415-2045	1.520	470	47	1.000	338	395	40	8.950	11,3	3	314	287	929
4,8T453	3.500	500	465-1.865	1.330	470	52	1.000	338	395	40	8.950	11,3	3	344	309	1.044
4,8T453	3.500	500	695-2.325	1.330	470	52	1.000	338	395	40	8.950	11,3	3	344	308	1.051
4,8T453	3.500	500	565-2.195	1.460	470	52	1.000	338	395	40	8.950	11,3	3	344	307	1.067



Qualities:

- Good visibility conditions
- Stable construction
- Rotation 360° endlessly
- Optionally with sideshift available



- Variations in width, opening ranges and arm dimensions available upon request.
- available with additional pair of forks - model T453W/180.
- Also available with sideshift, model T493 on request

Product Images

