


Rotating Fork Clamp T451

Rotation 360° continuous - 2 hydraulic functions

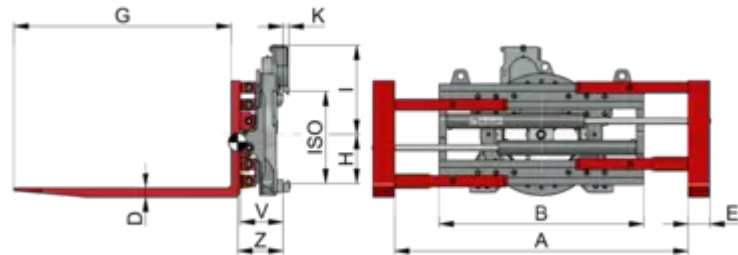

Specification:

The KAUP Rotating Fork Clamp T451 is an attachment designed with high visibility. Its solid, strengthened construction using 1000-fold proven basic components of the KAUP modular system gives numerous possibilities for heavy duty applications.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sideshift upon request.



Attachment is available for operation in explosion hazardous areas.



Attachment is designed with toe-in on the tips which should be taken into account when choosing the opening range.



Attachment is available with cylinder and sideshifter protection.



Rotating Fork Clamp T451

Technical specifications

Model																	
1,5T451	1.900	1.250	500	300-1.480	970	45	120	1.200	213	478	33	6.013	7,6	2	216	284	425
1,5T451	1.900	1.250	500	20-920	970	45	120	1.200	213	478	33	6.013	7,6	2	216	286	413
1,5T451	1.900	1.250	500	310-1.660	1.130	45	120	1.200	213	478	33	6.013	7,6	2	216	280	436
1,5T451	1.900	1.250	500	70-1.250	1.200	45	120	1.200	213	478	33	6.013	7,6	2	216	280	438
1,5T451	1.900	1.250	500	290-1.690	1.200	45	120	1.200	213	478	33	6.013	7,6	2	216	279	441
2T451	2.600	2.000	500	310-1.510	1.040	50	120	1.200	269	457	33	7.700	9,7	2	232	273	529
2T451	2.600	2.000	500	320-1.620	1.130	50	120	1.200	269	457	33	7.700	9,7	2	232	271	536
2T451	2.600	2.000	500	70-1.120	1.130	50	120	1.200	269	457	33	7.700	9,7	2	232	272	531
2T451	2.600	2.000	500	120-1.420	1.330	50	120	1.200	269	457	33	7.700	9,7	2	232	269	547
2T451	2.600	2.000	500	320-1.820	1.330	50	120	1.200	269	457	33	7.700	9,7	2	232	268	551
2T451	2.600	2.000	500	310-1.510	1.040	50	120	1.200	269	457	33	7.700	9,7	3	232	273	529
2T451	2.600	2.000	500	320-1.620	1.130	50	120	1.200	269	457	33	7.700	9,7	3	232	271	536
2T451	2.600	2.000	500	70-1.120	1.130	50	120	1.200	269	457	33	7.700	9,7	3	232	272	531
2T451	2.600	2.000	500	120-1.420	1.330	50	120	1.200	269	457	33	7.700	9,7	3	232	269	547
2T451	2.600	2.000	500	320-1.820	1.330	50	120	1.200	269	457	33	7.700	9,7	3	232	268	551
3T451	3.000	2.500	500	260-1.560	1.130	50	150	1.200	338	395	40	8.950	11,3	3	279	290	750
3T451	3.000	2.500	500	260-1.760	1.330	50	150	1.200	338	395	40	8.950	11,3	3	279	288	770
4T451	3.600	2.900	500	260-1.760	1.330	50	150	1.200	338	395	40	8.950	11,3	3	289	279	820
4T451	3.600	2.900	500	130-1.630	1.460	50	150	1.200	338	395	40	8.950	11,3	3	289	278	830

Model																	
4T451	3.600	2.900	500	260-1.890	1.460	50	150	1.200	338	395	40	8.950	11,3	3	289	278	835
4,8T451	4.500	3.500	500	250-1.650	1.330	60	150	1.200	338	395	40	8.950	11,3	3	314	294	990
4,8T451	4.500	3.500	500	120-1.520	1.460	60	150	1.200	338	395	40	8.950	11,3	3	314	293	995
4,8T451	4.500	3.500	500	220-1.720	1.460	60	150	1.200	338	395	40	8.950	11,3	3	314	293	1.000
5T451	4.500	3.500	600	270-1.670	1.330	70	150	1.200	351	445	40	13.434	15,7	4	360	332	1.191
5T451	4.500	3.500	600	280-1.910	1.550	70	150	1.200	351	445	40	13.434	15,7	4	360	329	1.237
5T451	4.500	3.500	600	550-2.450 ¹⁾	1.550	70	150	1.200	351	445	40	13.434	15,7	4	360	328	1.301
5T451	4.500	3.500	600	280-2.180	1.820	70	150	1.200	351	445	40	13.434	15,7	4	360	326	1.279
6T451B	6.000	4.200	600	490-2.390 ¹⁾	1.550	60	180	1.200	351	510	40	17.157	20,7	4	392	318	1.700



Qualities:

- Good visibility conditions
- Solid construction
- Rotation 360° endless
- Attachment also available with screw-on forks
- Opening range larger than the construction width
- Optionally available with sideshift



- 1) Transport of europallets lengthwise not possible.
- Also available with sideshift, model T491 on request
- with screw-on forks available upon request: T451A

Product Images

