


Rotating Fork Positioner foundry version T456ZG

Rotation 360° continuous - 2 hydraulic functions

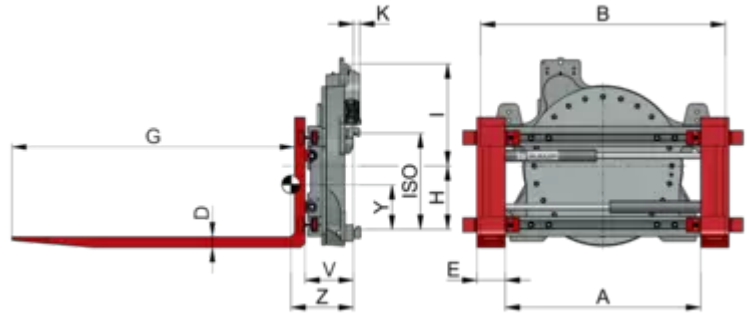

Specification:

The design is, in principle, the same as the normal T456BZ version, the foundry version of this attachment range is suitable for applications with extremely high working temperatures as found, for example, in steel works. Compared to the T456BZ, the KAUP Rotating Fork Positioner T456ZG has a closed front plate and basic plate as well as heat resistant coated hydraulic pipes.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is serially manufactured in foundry version. It is designed for operation in applications with extremely high temperatures. Further Information are displayed in a glossary in the info-center.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sidesift upon request.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is specially designed for the function fork positioning and is not suitable for clamping between the forks.



Attachment is designed with toe-in on the tips which should be taken into account when choosing the opening range.



Rotating Fork Positioner foundry version T456ZG

Technical specifications

Model																	
2T456BZG	2.500	500	130-930	1.150	45	120	1.200	269	457	33	7.700	9,7	2	230	247	216	542
2T456BZG	2.500	500	130-930	1.150	45	120	1.200	269	457	33	7.700	9,7	3	230	247	216	542
3,5T456BZG	3.600	500	130-930	1.150	50	150	1.200	338	395	40	8.950	11,3	3	258	273	235	712
4,5T456BZG	4.500	500	130-1.130	1.350	60	150	1.200	338	395	40	8.950	11,3	3	261	282	231	795
5T456ZG	5.000	600	260-1.260	1.700	60	150	1.200	345	445	40	13.434	15,7	4	345	313	281	1.014
8T456ZG	5.500	810	240-1.240	1.700	70	160	1.200	396	480	40	21.679	18,8	4	402	318	334	1.705



Qualities:

- Attachment also available with screw-on forks
- Solid construction
- Rotation 360° endless
- Optionally available with sideshift
- Larger models and construction widths optionally available



- Md: Torque at dP = 125 bar.
- Larger models and different widths available upon request.
- Also available with bolt-on forks: T456ZGA
- Also available with sideshift, model T496ZG on request

Product Images

