


Rotating Roll Clamp T458 P

360° rotation continuous - with parallel guided arms - 2 hydraulic functions

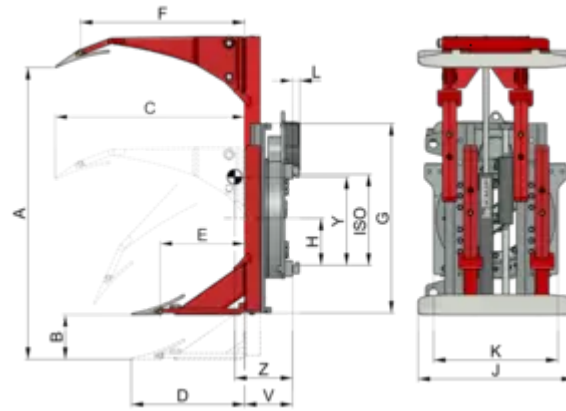

Specification:

The models of the class T458P/T258 of KAUP own an essential differentiation sign compared with other rotating role clamps: Independent of the used opening range the available clamp strength is always commensurate. This allows, that the carried product - no matter of which size - can always be taken up with the same strength carefully and can be transported certainly by parallel guided clamp arms.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sidesift upon request.



Attachment can be fitted with different types of contact pad surfaces specifically suited to the application.



Attachment is available restricted to 180° rotation.



Rotating Roll Clamp T458 P

Technical specifications

Model																				
1T458P	1.200	600	350-1.200	1.315	213	700	560	33	6.013	7,6	2	215	259	407	200	855	510	380	740	850
1,5T458P	1.200	675	300-1.350	1.425	213	700	560	33	6.013	7,6	2	215	272	421	200	925	580	450	810	970
2T458P	2.000	750	300-1.500	1.570	269	700	790	33	7.700	9,7	2	232	279	543	200	1.005	670	540	890	1.130
2T458P	2.000	750	300-1.500	1.570	269	700	790	33	7.700	9,7	3	232	279	543	200	1.005	670	540	890	1.130
3T458P	2.500	750	300-1.500	1.600	338	990	1.010	40	8.950	11,3	3	279	335	885	200	995	655	540	890	1.130
4T458P	3.200	935	430-1.870	1.985	328	800	870	36	8.950	11,3	3	292	346	1.128	200	1.290	865	750	1.155	1.330
10T258	8.200	1.150	900-2.300	2.700	328	1.050	1.120	-	23.000	32,8	-	360	350	3.500	300	1.485	1.010	-	-	1.800
15T258	11.000	1.150	900-2.300	2.700	328	1.500	1.120	-	23.000	32,8	-	450	500	8.200	400	1.485	1.010	-	-	2.230
20T258	15.000	1.150	900-2.300	2.700	328	1.500	1.350	-	34.500	46,2	-	520	600	9.500	400	1.485	1.010	-	-	2.230



Qualities:

- Robust construction
- Solid and very slender arm construction
- Rotation 360° endlessly



- Capacity related to max. roll diameter.
- Long arm mechanically adjustable.
- Pressure plate coverings see under accessories.
- Available as non rotating clamp model T418.
- Also available with sideshift, model T498P on request

Product Images

