


## Rotating Roll Clamp T458 S

Short arm fixed - 2 hydraulic functions

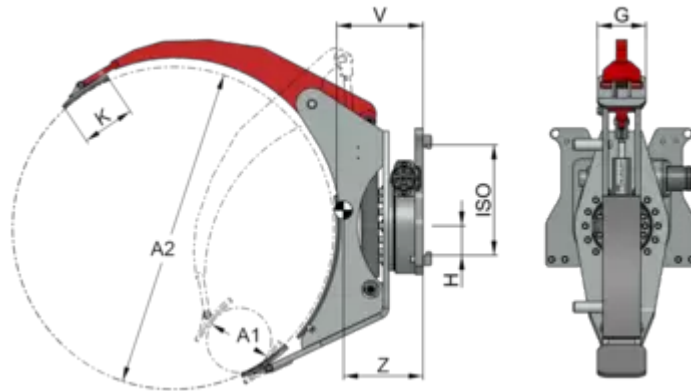

### Specification:

The view-optimised designed KAUP Rotating Roll Clamp T458S is well suited especially for the careful admission and the transport of narrow rolls from a width of 150 mm.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sidesift upon request.



Attachment can be fitted with different types of contact pad surfaces specifically suited to the application.



# Rotating Roll Clamp T458 S

## Technical specifications

Model													
1T458S	350	90°	600	250-1.200	180	200	84	1.950	--	2	340	258	245
1T458S	350	360°	600	250-1.200	180	200	109	2.570	3,0	2	320	222	260



## Qualities:

- Very good visibility conditions
- Favorable lost load and weight
- Respectable, slender arm construction
- Different contact pad coatings available
- Rotation 360° endlessly



- Capacity related to max. roll diameter.
- For taking up horizontal rolls, 5-degree mast forward tilt is required.
- Pressure plate coverings see under accessories.

## Product Images

