


## Rotating Tissue Roll Clamp T458BT

Rotation 360° endless - short arm hydraulically adjustable in each turning position (BCT = fixed) - continuous contact pad - 2 hydraulic functions

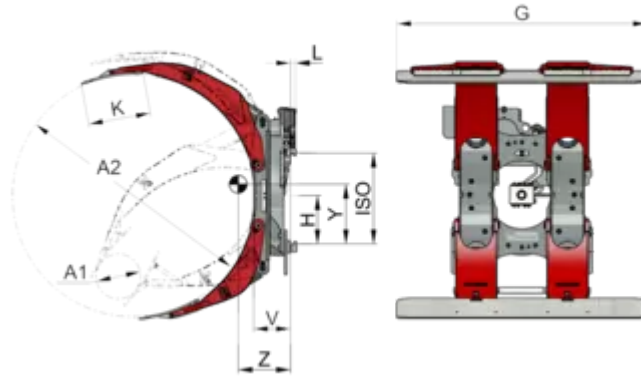

### Specification:

The new view-optimised designed KAUP Rotating Tissue Roll Clamp T458BT is well suited especially for the careful admission and the transport of paper and cellulose roles.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sidesift upon request.



Attachment can be fitted with different types of contact pad surfaces specifically suited to the application.



Attachment is available restricted to 180° rotation.



# Rotating Tissue Roll Clamp T458BT

## Technical specifications

| Model    |       |       |           |       |     |     |     |        |      |   |     |     |       |
|----------|-------|-------|-----------|-------|-----|-----|-----|--------|------|---|-----|-----|-------|
| 1T458BCT | 1.200 | 675   | 450-1.350 | 850   | 208 | 300 | 33  | 3.760  | 4,8  | 2 | 185 | 293 | 407   |
| 1T458BCT | 1.100 | 725   | 500-1.450 | 850   | 208 | 300 | 33  | 3.760  | 4,8  | 2 | 185 | 296 | 423   |
| 2T458BCT | 2.000 | 800   | 650-1.600 | 1.400 | 270 | 300 | 33  | 4.810  | 6,1  | 2 | 207 | 385 | 679   |
| 2T458BT  | 2.000 | 800   | 220-1.600 | 1.400 | 270 | 300 | 33  | 4.810  | 6,1  | 2 | 207 | 388 | 685   |
| 2T458BT  | 1.700 | 915   | 350-1.830 | 1.400 | 270 | 300 | 33  | 4.810  | 6,1  | 2 | 207 | 431 | 731   |
| 2T458BCT | 2.000 | 800   | 650-1.600 | 1.400 | 270 | 300 | 33  | 4.810  | 6,1  | 3 | 207 | 385 | 679   |
| 2T458BT  | 2.000 | 800   | 220-1.600 | 1.400 | 270 | 300 | 33  | 4.810  | 6,1  | 3 | 207 | 388 | 685   |
| 2T458BT  | 1.700 | 915   | 350-1.830 | 1.400 | 270 | 300 | 33  | 4.810  | 6,1  | 3 | 207 | 431 | 731   |
| 3T458BT  | 2.500 | 915   | 300-1.830 | 1.400 | 300 | 36  | 338 | 8.950  | 11,3 | 3 | 242 | 426 | 876   |
| 3T458BT  | 2.100 | 1.100 | 800-2200  | 1.400 | 300 | 36  | 338 | 8.950  | 11,3 | 3 | 242 | 485 | 968   |
| 4T458BT  | 3.400 | 915   | 350-1.830 | 1.800 | 350 | 36  | 383 | 12.591 | 11,2 | 3 | 255 | 470 | 1.286 |
| 4T458BT  | 2.800 | 1.100 | 800-2.200 | 1.800 | 350 | 36  | 383 | 12.591 | 11,2 | 3 | 255 | 533 | 1.350 |
| 4T458BT  | 3.400 | 915   | 350-1.830 | 1.800 | 350 | 36  | 516 | 12.591 | 11,2 | 4 | 255 | 470 | 1.286 |
| 4T458BT  | 2.800 | 1.100 | 800-2.200 | 1.800 | 350 | 36  | 516 | 12.591 | 11,2 | 4 | 255 | 533 | 1.350 |
| 5T458BT  | 3.700 | 1.000 | 500-2000  | 1.800 | 350 | 40  | 350 | 12.591 | 11,2 | 4 | 315 | 536 | 1.402 |
| 5T458BT  | 3.100 | 1.200 | 650-2.400 | 1.800 | 350 | 40  | 350 | 12.591 | 11,2 | 4 | 315 | 565 | 1.491 |



## Qualities:

- Very good visibility conditions
- Favorable lost load and weight
- Solid, slender arm construction
- Different contact pad coatings available
- Rotation 360° endlessly
- Limitation on rotation 180° optionally
- Service friendly



- BCT Version with fixed short arm.
- Capacity related to max. roll diameter.
- Optional: The short arm can be hydraulically adjusted at a rotation angle of 45°.
- All models available restricted to 180°.
- For taking up horizontal rolls, 5-degree mast forward tilt is required.
- Recommended length of contact pads: 70 % of roll width.
- Pressure plate coverings see under accessories.
- Attachment with sideshift Model T498BT/T498BCT (add-on price).

## Product Images

