


## Rotating Tyre Clamp T458BR

Rotation 360° endless - short arm hydraulically adjustable in each turning position (BCT = fixed) - continuous contact pad - 2 hydraulic functions

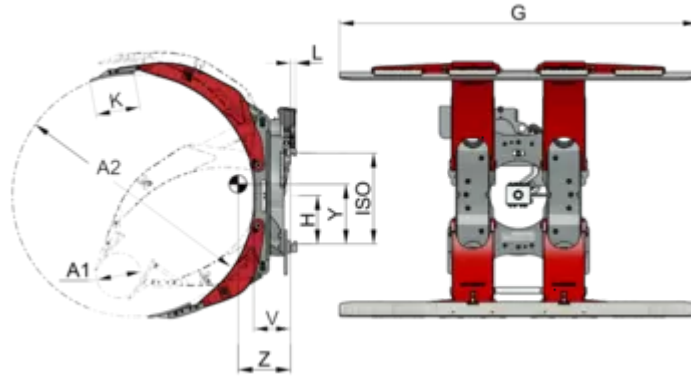

### Specification:

The new view-optimised designed KAUP Rotating Tyre Clamp T458BR is predestined for the transport of several tyres at the same size. The short clamp arm is hydraulically adjustable under a rotary corner of 45°, so a concentric load admission can be guaranteed with this role clamp.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sidesift upon request.



Attachment can be fitted with different types of contact pad surfaces specifically suited to the application.



Attachment is available restricted to 180° rotation.



# Rotating Tyre Clamp T458BR

## Technical specifications

Model													
1T458BCR	1.200	675	450-1.350	1.200	208	250	33	3.760	4,8	2	185	318	423
1T458BCR	1.100	725	500-1.450	1.200	208	250	33	3.760	4,8	2	185	322	439
1,5T458BR	1.150	675	200-1.350	2.000	208	250	33	3.760	4,8	2	185	369	476
1,5T458BR	800	800	250-1.600	2.000	208	250	33	3.760	4,8	2	185	410	517
2T458BR	2.400	675	200-1.350	2.000	270	250	33	4.810	6,1	2	207	360	647
2T458BR	2.000	800	220-1.600	2.000	270	250	32	4.810	6,1	2	207	399	697
2T458BR	1.700	915	350-1.830	2.000	270	250	32	4.810	6,1	2	207	442	743
2T458BR	2.400	675	200-1.350	2.000	270	250	33	4.810	6,1	3	207	360	647
2T458BR	2.000	800	220-1.600	2.000	270	250	32	4.810	6,1	3	207	399	697
2T458BR	1.700	915	350-1.830	2.000	270	250	32	4.810	6,1	3	207	442	743



## Qualities:

- Very good visibility conditions
- Favourable lost load and weight
- Solid, slender arm construction
- Rotation 360° endlessly
- Limitation on rotation 180° optionally
- Artificial positive rake optionally
- Service friendly



- BCR Version with fixed short arm.
- Capacity related to max. roll diameter.
- Optional: The short arm can be hydraulically adjusted at a rotation angle of 45°.
- All models available restricted to 180°.
- For taking up horizontal rolls, 5-degree mast forward tilt is required.
- Pressure plate coverings see under accessories.
- Attachment with sideshift Model T498BR/T498BCR (add-on price).

## Product Images

