


## Rotator 360° endless, fishing industry T391S - T391.3S

with independent sideshift - 2  
hydraulic functions

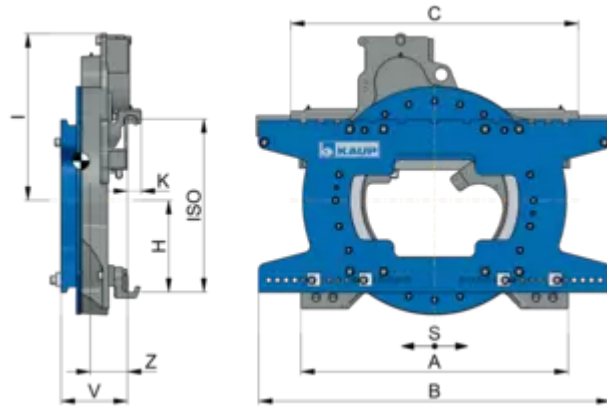

### Specification:

Beside the foundry implementation the KAUP Rotator 360° endless T391 is also available in two fishing implementation. These attachments are adapted to the demands of this operational area with special sea-water resistant paint, galvanised screws, flanges and fork carriages (according to implementation) as well as drill holes sealed with silicon.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is serially manufactured for the fishing industry and is available in two versions T351.1S and T351.1.3S. Further Information are displayed in a glossary in the info-center.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g.  $\pm 100$  mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



# Rotator 360° endless, fishing industry T391S - T391.3S

## Technical specifications

Model															
1T391.2S	1.800	500	±100	780	890	858	213	294	32	2	6.013	7,6	192	99	198
2T391.1S	2.500	500	±100	790	1.040	858	269	492	32	2	7.700	9,7	172	90	255
2,5T391.1S	3.200	500	±100	790	1.100	850	269	492	40	3	7.700	9,7	197	108	318
1T391.2.3S	1.800	500	±100	780	890	858	213	294	32	2	6.013	7,6	192	99	198
2T391.1.3S	2.500	500	±100	790	1.040	858	269	492	32	2	7.700	9,7	172	90	255
2,5T391.1.3S	3.200	500	±100	790	1.100	850	269	492	40	3	7.700	9,7	197	108	318



# Rotator 360° endless, fishing industry T391S - T391.3S



## Qualities:

- Good visibility conditions
- Good residual capacity
- Rotation 360° endlessly
- Robust construction with gear drive
- Independent sideshift serially
- Original forks usable
- Lateral supporting fork and load stabilizers optionally



- Rotators with higher rotating speeds available upon request
- Other fork carriage widths available upon request.
- Removable lateral supporting fork 800 mm available against add-on price
- Removable and foldable lateral supporting fork 800 mm available against add-on price
- Downhold T167 to empty metal grid boxes etc on request
- Matching forks for KAUP-Rotators on request.
- When forks are used in combination with a Rotator extremely high strain is applied to the lower fork angle when rotating a load which in turn strains the lower brackets.
- For this type of operation KAUP recommends forks with strengthened lower brackets. Strengthened lower brackets can be ordered for all ISO forks model T180.

## Product Images

