


Rotator 360° endless, foundry version T391G

with independent sideshift - 2 hydraulic functions

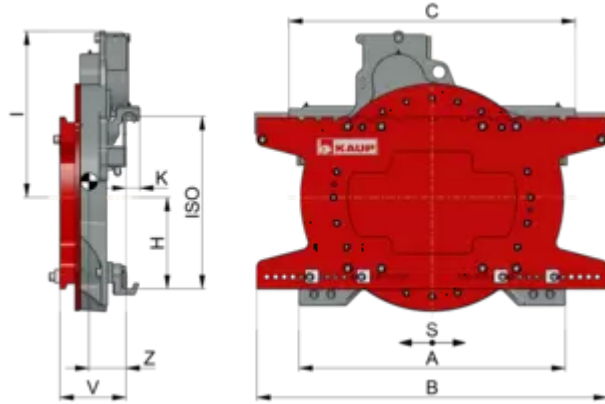

Specification:

The KAUP Rotator 360° endless T391 is also available in a foundry implementation. This attachment is adapted to the demands of this operational area with a closed fork carriage plate and a closed base plate as well as heat-resistant covered hydraulic tubes. Otherwise this rotator resembles the T391.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment is serially manufactured in foundry version. It is designed for operation in applications with extremely high temperatures. Further Information are displayed in a glossary in the info-center.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. ± 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



Rotator 360° endless, foundry version T391G

Technical specifications

Model															
1T391.2G	1.800	500	±100	800	890	858	203	410	32	2	6.013	7,6	206	114	276
2T391.1G	2.500	500	±100	800	1.040	880	269	492	32	2	7.700	9,7	204	115	327
2T391.1G	2.500	500	±100	800	1.150	880	269	492	32	2	7.700	9,7	204	116	335
2,5T391.1G	3.200	500	±100	800	1.100	850	269	492	40	3	7.700	9,7	205	121	420
3,5T391.1G	4.000	500	±100	1.060	1.100	1.060	381	539	43	3	11.815	13,8	210	117	544
4T391.1G	5.000	500	±100	1.110	1.100	940	378	595	43	3	14.823	17,4	218	113	610
4,5T391.1G	5.000	500	±160	1.110	1.350	940	378	695	49	4	14.823	17,4	238	128	723
5T391.2G	6.000	600	±160	1.240	1.350	1.260	345	455	50	4	13.434	15,7	275	156	804
6T391.2G	6.500	600	±160	1.260	1.350	1.260	345	455	50	4	17.157	20,7	275	147	925
8T391.2G	8.000	900	±160	1.300	1.600	1.700	396	480	54	4	21.679	18,8	304	165	1.145



Qualities:

- Foundry implementation
- Good residual capacity
- Rotation 360° endlessly
- Robust construction with gear drive
- Sideshift serially Original forks usable
- Lateral supporting fork and load stabilizers optionally



- Rotators with higher rotating speeds available upon request
- Other fork carriage widths available upon request.
- Removable lateral supporting fork 800 mm available against add-on price
- Removable and foldable lateral supporting fork 800 mm available against add-on price
- Rotators up to 40 T upon request.
- Matching forks for KAUP-Rotators on request.
- When forks are used in combination with a Rotator extremely high strain is applied to the lower fork angle when rotating a load which in turn strains the lower brackets.
- For this type of operation KAUP recommends forks with strengthened lower brackets. Strengthened lower brackets can be ordered for all ISO forks model T180.

Product Images

