


## Rotator 360° endless T391

with independent sideshift - 2  
hydraulic functions

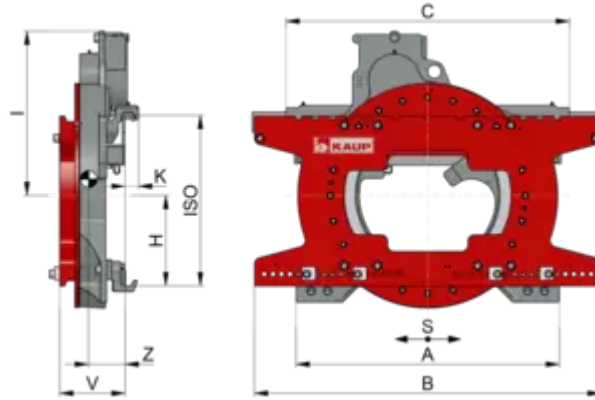

### Specification:

As opposed to the entrance models of the rotating attachments the KAUP Rotator 360° endless T391 owns a sideshift. It allows an even more exact work with the device.

According to application case and customer wish the gear can be positioned at two different places. Differing lost loads and residual capacities are the results.



Attachment rotates hydraulically by 360° endless in both directions.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g.  $\pm 100$  mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is available for operation in explosion hazardous areas.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



Please note the additional information below the data table.

## Technical specifications

Model															
1T391.2	1.800	500	±100	780	780	858	213	294	32	2	6.013	7,6	192	99	199
1T391.2	1.800	500	±100	780	890	858	213	294	32	2	6.013	7,6	192	101	205
2T391.1	2.500	500	±100	790	1.040	858	269	492	32	2	7.700	9,7	172	90	255
2T391.2	2.500	500	±100	1.000	1.040	950	270	345	32	2	7.700	9,7	208	104	283
2,5T391.1	3.200	500	±100	790	1.100	850	269	492	40	3	7.700	9,7	198	113	310
2,5T391.2	3.200	500	±100	1.000	1.100	1.043	270	345	40	3	7.700	9,7	208	110	350
4T391.2	5.000	500	±100	1.010	1.100	1.010	339	395	40	3	8.950	11,3	210	109	432
4,5T391.1	5.000	500	±160	1.110	1.350	940	378	675	49	4	14.823	17,4	229	123	595
5T391.2	6.000	600	±160	1.240	1.350	1.260	345	455	50	4	13.434	15,7	264	144	688
6T391.2	6.500	600	±160	1.260	1.350	1.260	345	455	50	4	17.157	20,7	264	138	790
8T391.2	8.000	900	±160	1.300	1.600	1.700	396	480	54	4	21.679	18,8	304	164	1.110



## Qualities:

- Good visibility conditions
- Good residual capacity
- Rotation 360° endlessly
- Robust construction with gear drive
- Sideshift serially
- Original forks usable
- Lateral supporting fork and load stabilizers optionally



- Rotators with higher rotating speeds available upon request
- Other fork carriage widths available upon request.
- Removable lateral supporting fork 800 mm available against add-on price
- Removable and foldable lateral supporting fork 800 mm available against add-on price
- Downhold T167 to empty metal grid boxes etc on request
- Matching forks for KAUP-Rotators on request.
- When forks are used in combination with a Rotator extremely high strain is applied to the lower fork angle when rotating a load which in turn strains the lower brackets.
- For this type of operation KAUP recommends forks with strengthened lower brackets. Strengthened lower brackets can be ordered for all ISO forks model T180.

## Product Images

