


Sideshifter High-Performance Model T151P2

1 hydraulic function

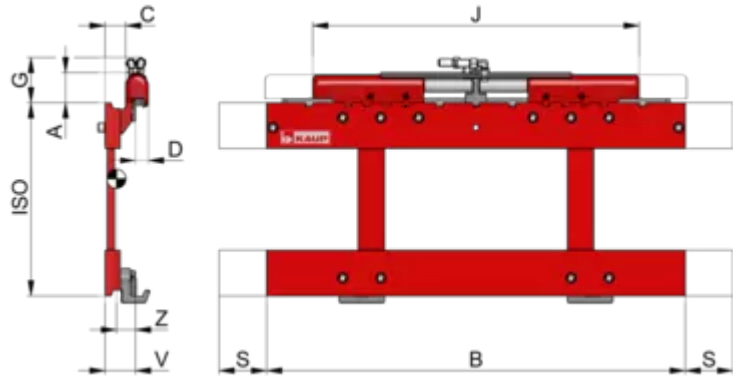

Specification:

Many requirements and different widths of fork carriages require an unlimited number of variations. The KAUP High-Performance Sideshifter type T151P2 supplies this variation. In addition, all sideshifter components such as housings, pistons and brackets are identical in design as those used in other KAUP attachments with additional sideshift function. This optimises maintenance and simplifies repairs.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires one additional hydraulic function.



Attachment can be fitted with load backrest model T179.



Attachment is available for operation in explosion hazardous areas.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



Sideshifter High-Performance Model T151P2

Technical specifications

Model													
2T151P2	2.500	600	76	890	44	32	±100	116	858	2	72	37	70
2T151P2	2.500	600	76	920	44	32	±100	116	858	2	72	37	72
2T151P2	2.500	600	76	980	44	32	±100	116	858	2	72	38	74
2T151P2	2.500	600	76	1.020	44	32	±100	116	858	2	72	39	76
2T151P2	2.500	600	76	1.040	44	32	±100	116	858	2	72	39	77
2T151P2	2.500	600	76	1.150	44	32	±100	116	858	2	72	43	97
2T151P2	2.500	600	76	1.600	54	32	±100	116	858	2	82	52	146
3T151P2 ¹⁾	3.000	500	76	1.020	54	34	±100	116	858	3	82	45	106
3T151P2 ¹⁾	3.000	500	76	1.070	54	34	±100	116	858	3	82	45	110
3T151P2 ¹⁾	3.000	500	76	1.100	54	34	±100	116	858	3	82	46	112
3T151P2 ¹⁾	3.000	500	76	1.150	54	34	±100	116	858	3	82	46	115
3T151P2 ¹⁾	3.000	500	76	1.300	54	34	±100	116	858	3	82	48	132
3T151P2 ¹⁾	3.000	500	76	1.600	64	34	±100	116	858	3	92	57	207
4T151P2	5.000	500	85	1.100	50	40	±100	125	1.040	3	82	41	136
4T151P2	5.000	500	85	1.150	50	40	±100	125	1.040	3	82	41	139
4T151P2	5.000	500	85	1.200	50	40	±100	125	1.040	3	82	42	143
4T151P2	5.000	500	85	1.300	50	40	±100	125	1.040	3	82	44	156
4T151P2	5.000	500	85	1.350	50	40	±100	125	1.040	3	82	44	165
4T151P2	5.000	500	85	1.600	60	40	±100	125	1.040	3	92	54	231

Model													
4T151P2	5.000	500	85	1.800	60	40	±100	125	1.040	3	92	55	248
4T151P2	5.000	500	85	2.000	60	40	±100	125	1.040	3	92	56	256
4,8T151P2	5.000	600	103	1.150	42	44	±100	165	922	3	82	39	149
4,8T151P2	5.000	600	103	1.200	42	44	±100	165	922	3	82	40	153
4,8T151P2	5.000	600	103	1.300	42	44	±100	165	922	3	82	42	166
4,8T151P2	5.000	600	103	1.350	42	44	±100	165	922	3	82	42	175
4,8T151P2	5.000	600	103	1.410	42	44	±100	165	922	3	82	44	190
4,8T151P2	5.000	600	103	1.600	52	44	±100	165	922	3	92	52	241
4,8T151P2	5.000	600	103	1.800	52	44	±100	165	922	3	92	53	258
4,8T151P2	5.000	600	103	2.000	52	44	±100	165	922	3	92	56	313
5T151P2	5.000	600	80	1.220	60	42	±100	125	1.040	4	92	51	212
5T151P2	5.000	600	80	1.400	60	42	±100	125	1.040	4	92	53	231
5T151P2	5.000	600	80	1.800	70	42	±100	125	1.040	4	102	63	334
5T151P2	5.000	600	80	2.180	70	42	±100	125	1.040	4	102	63	383
5T151P2	5.000	600	80	2.260	70	53	±100	125	1.040	4	112	65	455
5,5T151P2	7.000	600	96	1.220	52	44	±100	156	922	4	92	50	230
5,5T151P2	7.000	600	96	1.400	52	44	±100	156	922	4	92	51	249
5,5T151P2	7.000	600	96	1.800	62	44	±100	156	922	4	102	61	352
5,5T151P2	7.000	600	96	2.180	62	44	±100	156	922	4	102	62	401
5,5T151P2	7.000	600	96	2.260	62	44	±100	156	922	4	102	62	473
6T151P2	8.000	600	112	1.400	50	53	±160	212	1.392	4	92	42	295
6T151P2	8.000	600	112	1.800	60	53	±160	212	1.392	4	102	53	397
6T151P2	8.000	600	112	2.180	60	53	±160	212	1.392	4	102	55	446

Model													
6T151P2	8.000	600	112	2.260	70	53	±160	212	1.392	4	112	61	516
10T151	8.000	1.100	112	1.800	54	53	±160	45	1.510	4	106	46	455
10T151	8.000	1.100	112	2.000	54	53	±160	45	1.510	4	106	46	490
10T151	8.000	1.100	112	2.260	54	53	±160	45	1.510	4	106	46	535
10T151	8.000	1.100	112	2.400	54	53	±160	45	1.510	4	106	46	560



Qualities:

- Strong design for heavy duty operation
- Best visibility
- Construction widths of up to 3.500 mm possible
- Equal shifting force and shifting speeds in both directions



- 1) Exclusively for FLT's with 3.000 kg. capacity at 500 mm LCD.
- Load Backrest see model T179.
- Additional for T151P2 (add-on price): Load backrest drill holes, set of adapter connection, hose kit and set of quick release system
- Other construction widths available upon request.
- Optional in explosion proof version

Product Images

