


## Triple Pallet Handler on a Pantograph T429/T149Z



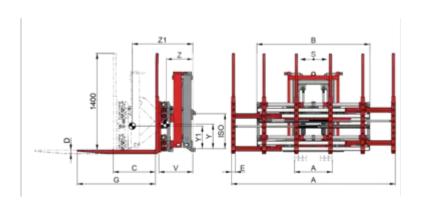

#### **Specification:**

The combination of the well known KAUP Multi Pallet Handler with a Pantograph T149Z creates an attachment with a multitude of application possibilities. It makes speedy loading of lorries or wagons from the side possible as well as loading and unloading double deep storage racks. As with all other KAUP Multi Pallet Handlers, the Triple Pallet Handler with Pantograph type T429B-1-2-3/T149Z has a durable and reliable construction with a minimum of required maintenance with maximum operation.



Mehrfach-Palettenhandling: For double deep loading and unloading of 1 or 2 pallets or e.g. of 1, 2 or 3 pallets.



Attachment requires more than two additional hydraulic functions in order to operate. In this case one of the hydraulic circuits is split by use of a solenoid valve which is part of the attachment.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g.  $\pm$  100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Please note the additional information below the data table.



# Triple Pallet Handler on a Pantograph T429/T149Z

## **Technical specifications**

| Model               |       |     |      |           |       |    |    |       |     |   |     |     |     |     |     |       |
|---------------------|-------|-----|------|-----------|-------|----|----|-------|-----|---|-----|-----|-----|-----|-----|-------|
| 3T429B-1-2-3/3T149Z | 2.650 | 600 | ±100 | 560-2.410 | 1.660 | 50 | 60 | 1.150 | 750 | 3 | 525 | 375 | 933 | 404 | 363 | 1.442 |
| 3T429B-1-2-3/3T149Z | 2.650 | 600 | ±100 | 560-2.410 | 1.660 | 50 | 60 | 1.150 | 750 | 4 | 525 | 377 | 938 | 365 | 324 | 1.435 |



## Triple Pallet Handler on a Pantograph T429/T149Z



#### **Qualities:**

- Good visibility conditions
- Synchronized for quicker working speeds
- Independent sideshift serially
- Screw-on forks serially



- Fork length optional 1200 mm, 1150 mm or 1000 mm.
- Locating claw on fork tip available upon request.
- Wider fork shanks available upon request.

### **Product Images**