



Triple Pallet Handler T429B1-2-3

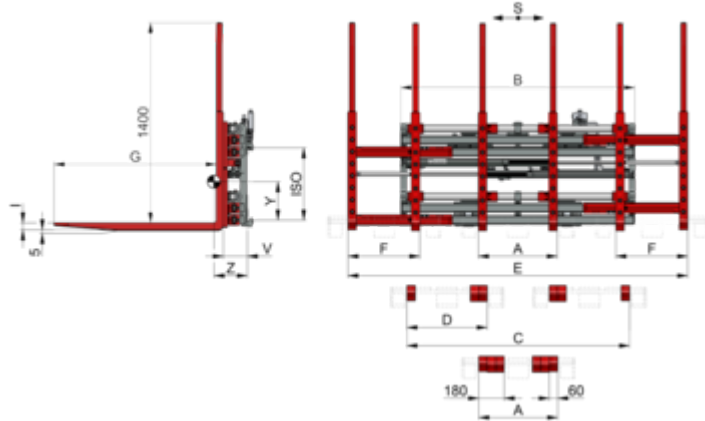

Specification:

The simple construction of KAUP Triple Pallet Handler T429B1-2-3 with innovated visibility improved design ensures a clear view through and over the attachment to the fork tips and load. The practice orientated construction from T-profiles and C-profiles ensures highest stability and long operating hours with extended intervals between servicing and a minimum of required maintenance even in heavy duty operation. The excellent residual capacity compared to similar models increases the productivity of this Multi Pallet Handler even more.

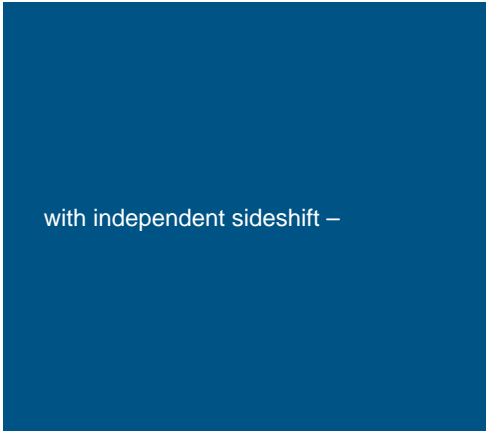

Mehrfach-Palettenhandling: For double deep loading and unloading of 1 or 2 pallets or e.g. of 1, 2 or 3 pallets.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. ± 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Please note the additional information below the data table.



Triple Pallet Handler T429B1-2-3

Technical specifications

Model																		
3T429B-1-2-3	800x1200	3.000	600	4,0/500	±100	1.460	560	1.580	2.210	570	510	1.150	50	3	170	227	275	712
3T429B-1-2-3	800x1200	3.000	600	4,0/500	±100	1.660	560	1.580	2.410	570	510	1.150	50	3	170	221	277	739
3T429B-1-2-3	800x1200	3.000	600	4,0/500	±100	1.760	560	1.580	2.510	570	510	1.150	50	3	170	219	278	752
3T429B-1-2-3	1000x1200	3.000	600	4,0/500	±100	1.960	660	1.900	2.910	680	620	1.150	50	3	170	213	273	781
3T429B-1-2-3	800x1200	3.000	600	4,0/500	±100	1.460	560	1.580	2.210	570	510	1.150	50	2	170	227	275	712
3T429B-1-2-3	800x1200	3.000	600	4,0/500	±100	1.660	560	1.580	2.410	570	510	1.150	50	2	170	221	277	739
3T429B-1-2-3	800x1200	3.000	600	4,0/500	±100	1.760	560	1.580	2.510	570	510	1.150	50	2	170	219	278	752
3T429B-1-2-3	1000x1200	3.000	600	4,0/500	±100	1.960	660	1.900	2.910	680	620	1.150	50	2	170	213	273	781
4T429B-1-2-3	800x1200	3.800	600	5,0/500	±100	1.460	560	1.580	2.210	570	510	1.150	60	3	170	244	268	761
4T429B-1-2-3	800x1200	3.800	600	5,0/500	±100	1.660	560	1.580	2.410	570	510	1.150	60	3	170	238	270	787
4T429B-1-2-3	800x1200	3.800	600	5,0/500	±100	1.760	560	1.580	2.510	570	510	1.150	60	3	170	236	271	800
4T429B-1-2-3	1000x1200	3.800	600	5,0/500	±100	1.960	660	1.900	2.910	680	620	1.150	60	3	170	230	273	829
4T429B-1-2-3	1200x1000	3.800	600	5,0/500	±100	2.150	670	1.910	3.120	680	620	1.000	60	3	170	193	283	851
5T429B-1-2-3	800x1200	4.500	600	6,0/600	±160	1.460	560	1.580	2.210	570	510	1.150	60	4	190	243	321	861
5T429B-1-2-3	800x1200	4.500	600	6,0/600	±160	1.660	560	1.580	2.410	570	510	1.150	60	4	190	238	323	890
5T429B-1-2-3	1000x1200	4.500	600	6,0/600	±160	1.960	660	1.900	2.910	680	620	1.150	60	4	190	231	327	935
5T429B-1-2-3	1200x1000	4.500	600	6,0/600	±160	2.150	670	1.910	3.120	680	620	1.000	60	4	190	199	341	954



Qualities:

- Triple Pallet Handlers for heavy duty tasks
- Very good visibility conditions
- Excellent residual capacity - best lost load centre in this class
- Synchronized for quicker working speeds
- Independent sideshift serially
- Screw-on forks serially
- Optional: independent control of separate fork pairs - adjustment of opening range to suit different types of pallets



- 1) Solenoid valve for individual control of pallets left and right. (add-on-price)
- Fork length optional 1200 mm, 1150 mm or 1000 mm.
- Locating claw on fork tip available upon request. Wider fork shanks available upon request.

Product Images

