


Triple Sideshifter T253B-3

with 3 fork carriages - 2 hydraulic functions ¹⁾

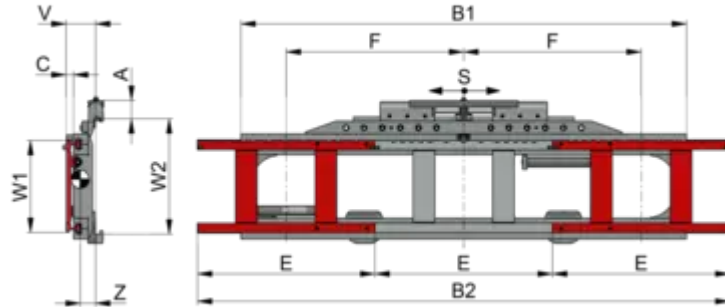

Specification:

The Triple Sideshifter T253B-3 is a part of the KAUP Multiple Sideshifter product range. This attachment extends the operation of every forklift truck as the Triple Sideshifter can simultaneously pick up three transport units next to each other.



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



Attachment can be fitted with load backrest model T179.



Please note the additional information below the data table.



Triple Sideshifter T253B-3

Technical specifications

Model															
3T253B-L-3	900	600	2	3	85	2.160	720	720-1.000	±100	148	73	250	375	2.100	35
3T253B-Q-3	900	600	2	3	85	2.940	980	980-1.260	±100	158	77	234	524	2.700	35
3T253B-L/Q-3	900	600	2	3	85	2.400	800	800-1.390	±100	158	76	234	537	2.950	35
6T253B-L-3	1.500	600	3	4	118	2.320	720	800-1.050	±160	162	74	307	595	2.260	41
6T253B-Q-3	1.500	600	3	4	118	2.940	980	980-1.230	±160	162	77	330	645	2.460	41
6T253B-L/Q-3	1.500	600	3	4	118	2.320	720	800-1.200	±160	162	75	333	620	2.460	41



Qualities:

- Very good residual capacity
- Good visibility conditions
- SMOOTHROLL- bottom hooks with compact rollers and SOFTSTOP-end of stroke slow down serially
- Optional: single or pairwise control of fork pairs



- L = Pallet handling lengthwise / Q = Pallet handling crosswise. / L / Q = Pallet handling lengthwise and crosswise.
- 1) Alternatively available with solenoid valve for individual adjustment of the fork carriages.
- Forks see model T180.
- Please observe necessary fork shank under-clearance.
- Higher capacities and other construction widths available upon request.
- Load Backrest see model T179.

Product Images

