


Appliance Clamp T413G

with independent sideshift –

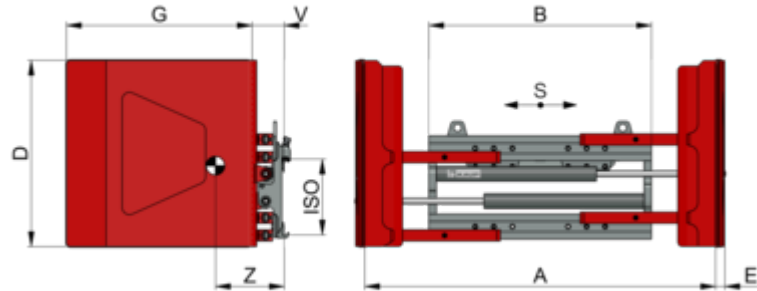

Specification:

The KAUP Appliance Clamp T413G is used for the transport of white and brown product as well as other wide loading property. Equipped with very slender arms this attachment is suited particularly for the truck and container loading.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. ± 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment is available with Smart Load Control (SLC), an autonomous system for controlling the clamp force. The required pressures are always adjusted autonomously depending on the load.



Attachment can be fitted with load backrest model T479. The load backrest model T479.1 is suitable for fork positioners T160B and T466B up to 4.8T.



Attachment can be fitted with different types of contact pad surfaces specifically suited to the application.



Attachment is available with automatic pressure adjustment.



Attachment is designed with toe-in on the tips which should be taken into account when choosing the opening range.



Appliance Clamp T413G

Technical specifications

Model												
1T413G	700	500	±100	500-1.680	970	700	23	690	2	153	207	275
1T413G	700	500	±100	500-1.680	970	1.000	23	690	2	153	248	332
1T413G	700	500	±100	500-1.680	970	1.200	23	690	2	153	250	353
1T413G	700	500	±100	350-1.450	1.040	700	23	690	2	153	206	270
1T413G	700	500	±100	350-1.450	1.040	1.000	23	690	2	153	249	323
1T413G	700	500	±100	350-1.450	1.040	1.200	23	690	2	153	253	342
1T413G	700	500	±100	550-1.850	1.040	700	23	690	2	153	203	280
1T413G	700	500	±100	550-1.850	1.040	1.000	23	690	2	153	245	337
1T413G	700	500	±100	550-1.850	1.040	1.200	23	690	2	153	247	359
1T413G	700	500	±100	460-1.760	1.130	700	23	690	2	153	201	285
1T413G	700	500	±100	460-1.760	1.130	1.000	23	690	2	153	242	342
1T413G	700	500	±100	460-1.760	1.130	1.200	23	690	2	153	245	364
1T413G	700	500	±100	490-1.890	1.200	700	23	690	2	153	199	290
1T413G	700	500	±100	490-1.890	1.200	1.000	23	690	2	153	240	347
1T413G	700	500	±100	490-1.890	1.200	1.200	23	690	2	153	243	368
1,5T413G	1.250	500	±100	515-1.695	970	700	28	690	2	158	221	351
1,5T413G	1.250	500	±100	515-1.695	970	1.000	23	690	2	153	220	362
1,5T413G	1.250	500	±100	515-1.695	970	1.200	23	690	2	153	241	395
1,5T413G	1.250	500	±100	475-1.655	970	1.000	63	1.000	2	133	365	440

Model												
1,5T413G	1.250	500	±100	475-1.655	970	1.000	63	1.200	2	133	421	453
1,5T413G	1.250	500	±100	475-1.655	970	1.200	63	1.200	2	133	491	508
1,5T413G	1.250	500	±100	365-1.465	1.040	700	28	690	2	158	221	346
1,5T413G	1.250	500	±100	365-1.465	1.040	1.000	23	690	2	153	221	353
1,5T413G	1.250	500	±100	365-1.465	1.040	1.200	23	690	2	153	240	398
1,5T413G	1.250	500	±100	325-1.425	1.040	1.000	63	1.000	2	133	364	442
1,5T413G	1.250	500	±100	325-1.425	1.040	1.000	63	1.200	2	133	420	455
1,5T413G	1.250	500	±100	325-1.425	1.040	1.200	63	1.200	2	133	491	510
1,5T413G	1.250	500	±100	445-1.625	1.040	700	28	690	2	158	221	347
1,5T413G	1.250	500	±100	445-1.625	1.040	1.000	23	690	2	153	221	354
1,5T413G	1.250	500	±100	445-1.625	1.040	1.200	23	690	2	153	243	384
1,5T413G	1.250	500	±100	405-1.585	1.040	1.000	63	1.000	2	133	364	442
1,5T413G	1.250	500	±100	405-1.585	1.040	1.000	63	1.200	2	133	420	455
1,5T413G	1.250	500	±100	405-1.585	1.040	1.200	63	1.200	2	133	491	510
1,5T413G	1.250	500	±100	475-1.775	1.130	700	28	690	2	158	216	361
1,5T413G	1.250	500	±100	475-1.775	1.130	1.000	23	690	2	153	216	373
1,5T413G	1.250	500	±100	475-1.775	1.130	1.200	23	690	2	153	237	406
1,5T413G	1.250	500	±100	485-1.835	1.130	1.000	63	1.000	2	133	361	452
1,5T413G	1.250	500	±100	485-1.835	1.130	1.000	63	1.200	2	133	417	465
1,5T413G	1.250	500	±100	485-1.835	1.130	1.200	63	1.200	2	133	487	520
1,5T413G	1.250	500	±100	505-1.905	1.200	700	28	690	2	158	214	367
1,5T413G	1.250	500	±100	505-1.905	1.200	1.000	23	690	2	153	214	378
1,5T413G	1.250	500	±100	505-1.905	1.200	1.200	23	690	2	153	235	411

Model												
1,5T413G	1.250	500	±100	465-1.865	1.200	1.000	63	1.000	2	133	360	461
1,5T413G	1.250	500	±100	465-1.865	1.200	1.000	63	1.200	2	133	415	474
1,5T413G	1.250	500	±100	465-1.865	1.200	1.200	63	1.200	2	133	485	529



Qualities:

- Low lost load - very good residual capacities
- Very good visibility conditions
- Very slender clamp arms
- Independent sideshift serially
- Load backrest optionally



- Add-on price for 100mm armlength / -height on request,
- Option: with automatic pressure switching (sensor technology) or attachment available with Smart Load Control (SLC), an autonomous system for controlling the clamp force (models 2T after design adaptation).
- For contact pad coatings see accessories in the pricelist.
- Also available without sideshift, model T403G/GL
- Load Backrest see model T179.

Product Images

