


## Fork Carriage T013

to enlarge the width of the original fork carriage or as false carriage for fork drop-off

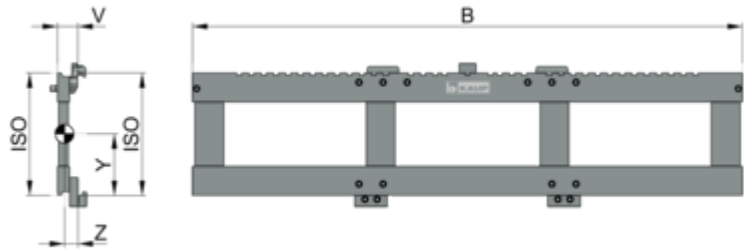

### Specification:

The existing fork carriage of the forklift truck can be extended with a KAUP Fork Carriage type T013. It can also be used for quick change between attachments and/or forks.

Upon request KAUP Fork Carriages can be supplied to increase the lost load centre and as adapter fork carriage between the forklift truck and other attachments.



Attachment is serially designed without sideshift. It can be fitted with separate or valveblock sidesift upon request.



Attachment can be fitted with load backrest model T179.



Please note the additional information below the data table.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



# Fork Carriage T013

## Technical specifications

| Model   |       |     |       |   |    |    |     |     |
|---------|-------|-----|-------|---|----|----|-----|-----|
| 2T013   | 2.500 | 600 | 920   | 2 | 65 | 38 | 206 | 68  |
| 2T013   | 2.500 | 600 | 980   | 2 | 65 | 39 | 206 | 70  |
| 2T013   | 2.500 | 600 | 1.020 | 2 | 65 | 39 | 206 | 72  |
| 2T013   | 2.500 | 600 | 1.040 | 2 | 65 | 39 | 206 | 73  |
| 2T013   | 2.500 | 600 | 1.150 | 2 | 65 | 41 | 205 | 93  |
| 2T013   | 2.500 | 600 | 1.600 | 2 | 75 | 49 | 203 | 143 |
| 3T013   | 3.000 | 500 | 1.020 | 3 | 75 | 46 | 256 | 101 |
| 3T013   | 3.000 | 500 | 1.070 | 3 | 75 | 46 | 256 | 105 |
| 3T013   | 3.000 | 500 | 1.100 | 3 | 75 | 46 | 256 | 107 |
| 3T013   | 3.000 | 500 | 1.150 | 3 | 75 | 47 | 256 | 110 |
| 3T013   | 3.000 | 500 | 1.300 | 3 | 75 | 48 | 255 | 127 |
| 3T013   | 3.000 | 500 | 1.600 | 3 | 85 | 55 | 254 | 203 |
| 4,8T013 | 5.000 | 600 | 1.150 | 3 | 75 | 42 | 278 | 128 |
| 4,8T013 | 5.000 | 600 | 1.200 | 3 | 75 | 42 | 277 | 132 |
| 4,8T013 | 5.000 | 600 | 1.300 | 3 | 75 | 43 | 275 | 145 |
| 4,8T013 | 5.000 | 600 | 1.350 | 3 | 75 | 44 | 274 | 148 |
| 4,8T013 | 5.000 | 600 | 1.600 | 3 | 85 | 51 | 267 | 220 |
| 4,8T013 | 5.000 | 600 | 1.800 | 3 | 85 | 52 | 266 | 237 |
| 4,8T013 | 5.000 | 600 | 2.000 | 3 | 85 | 53 | 265 | 255 |

| Model |       |     |       |   |     |    |     |     |
|-------|-------|-----|-------|---|-----|----|-----|-----|
| 8T013 | 8.000 | 600 | 1.400 | 4 | 90  | 51 | 352 | 246 |
| 8T013 | 8.000 | 600 | 1.800 | 4 | 100 | 60 | 345 | 348 |
| 8T013 | 8.000 | 600 | 2.180 | 4 | 100 | 61 | 342 | 397 |
| 8T013 | 8.000 | 600 | 2.260 | 4 | 110 | 67 | 338 | 466 |



## Qualities:

- Solid construction for heavy duty operation
- Best visibility



- Load Backrest see model T179.
- Other construction widths available upon request.
- Available in combination with quick release bottom hooks for quick change fork applications to other attachments.
- Fork Carriage with artificial lost load center distance available upon request.

## Product Images

