


Fork Clamp with Turnable Forks T411D

with independent sideshift –

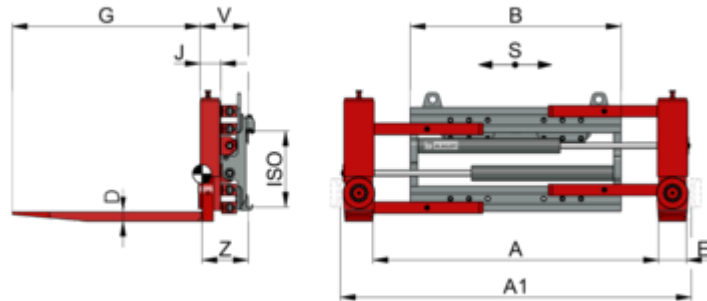

Specification:

Flexibility is the motto of the KAUP Fork Clamp with Turnable Forks T411D. This clamp is a very universally applicable attachment, because the carrying part of the hook-on forks is turnable by $\pm 90^\circ$. Therefore, the rotary hook-on fork clamp can be used for hook-on fork works as well as the clamps by bale, boxes and cardboards. If the carrying part are turned only around by 45° , besides, the transport of barrels or other cylindrical bodies is easily possible.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. ± 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment can be fitted with load backrest model T479. The load backrest model T479.1 is suitable for fork positioners T160B and T466B up to 4.8T.



Fork Clamp with Turnable Forks T411D

Technical specifications

Model															
1T411D	1.500	700	500	±100	310-1.490	970	40	100	1.200	580-1.760	110	2	248	245	331
1,5T411D	2.000	1.250	500	±100	110-1.110	970	40	120	1.200	400-1.400	110	2	248	267	343
1,5T411D	2.000	1.250	500	±100	290-1.470	970	40	120	1.200	580-1.760	110	2	248	263	353
1,5T411D	2.000	1.250	500	±100	300-1.650	1.130	40	120	1.200	590-1.940	110	2	248	257	364
1,5T411D	2.000	1.250	500	±100	280-1.680	1.200	40	120	1.200	570-1.970	110	2	248	254	369
2T411D	2.800	2.000	500	±100	220-1.420	1.040	50	150	1.200	570-1.770	110	2	258	305	450
2T411D	2.800	2.000	500	±100	220-1.420	1.040	50	150	1.200	570-1.770	110	3	258	305	450
2T411D	2.800	2.000	500	±100	130-1.330	1.130	50	150	1.200	480-1.680	110	3	258	302	456
2T411D	2.800	2.000	500	±100	230-1.530	1.130	50	150	1.200	580-1.880	110	3	258	301	458
2T411D	2.800	2.000	500	±100	230-1.730	1.330	50	150	1.200	580-2.080	110	3	258	294	473
2T411D	2.800	2.000	500	±100	130-1.330	1.130	50	150	1.200	480-1.680	110	2	258	302	456
2T411D	2.800	2.000	500	±100	230-1.530	1.130	50	150	1.200	580-1.880	110	2	258	301	458
2T411D	2.800	2.000	500	±100	230-1.730	1.330	50	150	1.200	580-2.080	110	2	258	294	473
3T411D	3.600	2.500	500	±100	225-1.525	1.130	60	150	1.200	605-1.905	130	3	288	287	573
3T411D	3.600	2.500	500	±100	225-1.855	1.460	60	150	1.200	605-2.235	130	3	288	276	604



Qualities:

- Suitable for handling of the most different load forms - palletised product, grid boxing, under run loads (basic position), barrels and cylindrical bodies (45° positions), bales, clamps, cardboards etc. (90° positions)
- Very good visibility conditions
- Separate sideshift as standard
- Load backrest optional
- Optional slip-on clamping arms



- Hydraulically turnable forks available upon request.
- Slip-on arms for the forks model T103A and T103AG
- Also available without sideshift, model T401D
- Load Backrest see model T179.
- Fork length max. 1.300 mm

Product Images

