


Fork Positioner, integrated T466BI

with independent sideshift - without
forks - for forks acc. to ISO 2330 - 2
hydraulic functions

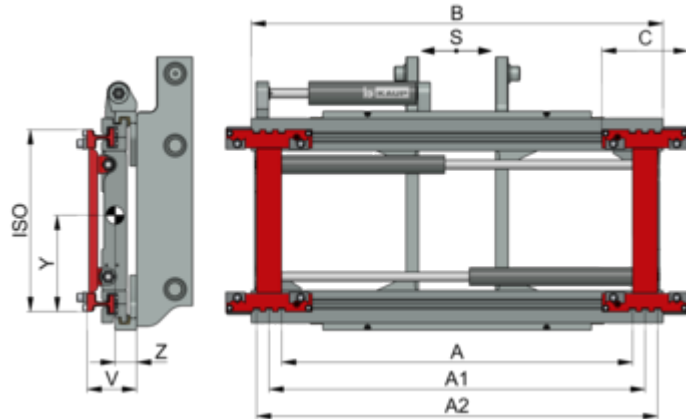

Specification:

The KAUP integrated Fork Positioner T466BI has been specially designed with optimised visibility and residual capacity. Compared to hook-on Fork Positioners in the T466 range with even better, higher residual capacities this attachment is manufactured from well proven components and is suitable for moderately heavy duty tasks. The qualities of the range of T466BI Fork Positioners are particularly effective when different sizes of loads are regularly transported or different kinds of transportation are used - for example in logistics.



Attachment has separate sideshift as standard. The maximum allowable sideshift stroke (e.g. ± 100 mm) is always available independent of fork or arm position (with clamps or fork positioners).



Attachment is operated hydraulically, i.e. supplied with oil from the forklift truck's hydraulic system. Truck requires two additional hydraulic functions.



Attachment supplied serially without forks. All forks in accordance with ISO 2330 can be used. Matching forks model T180 are available.



Attachment can be fitted with load backrest model T479. The load backrest model T479.1 is suitable for fork positioners T160B and T466B up to 4.8T.



Attachment is available for operation in explosion hazardous areas.



Attachment is specially designed for the function fork positioning and is not suitable for clamping between the forks.



Fork Positioner, integrated T466BI

Technical specifications

Model														
2T466BI	2.500	500	150-850	250-950	320-1.020	1.040	240	±100	120	2	133	58	218	156
2T466BI	2.500	500	150-950	250-1.050	320-1.120	1.150	240	±100	120	2	133	58	217	163
2,5T466BI	2.500	600	150-850	250-950	320-1.020	1.040	240	±100	120	2	133	60	218	158
2,5T466BI	2.500	600	150-950	250-1.050	320-1.120	1.150	240	±100	120	2	133	60	217	165
3,5T466BI	3.500	500	180-980	250-1.050	320-1.120	1.150	240	±100	130	3	138	61	267	173
3,5T466BI	3.500	500	180-1.180	250-1.250	320-1.320	1.350	240	±100	130	3	138	59	265	197
4,8T466BI ¹⁾	5.000	600	180-1.180	250-1.250	320-1.320	1.350	255	±100	150	3	148	65	268	279
4,8T466BI ¹⁾	5.000	600	180-1.360	250-1.430	320-1.500	1.550	255	±100	150	3	148	62	266	319
6T466BI	6.000	600	260-1.170	350-1.260	440-1.350	1.460	330	±100	150	4	170	70	330	375
6T466BI	6.000	600	260-1.360	350-1.450	440-1.540	1.650	330	±160	150	4	170	65	352	435
6T466BI	6.000	600	260-1.560	350-1.650	440-1.740	1.860	330	±160	150	4	170	64	348	473
8T466BI	8.000	600	260-1.560	350-1.650	440-1.740	1.860	330	±160	150	4	170	64	348	473
8T466BI	8.000	600	260-1.760	350-1.850	440-1.940	2.060	330	±160	150	4	170	63	345	517
8T466BI	8.000	600	260-1.960	350-2.050	440-2.140	2.260	330	±160	150	4	170	63	345	547
8T466BI	8.000	600	260-2.060	350-2.150	440-2.240	2.400	330	±160	150	4	170	62	344	579
10T466BI	8.000	1.100	260-1.760	360-1.860	460-1.960	2.060	370	±160	200	4	244	104	323	909
10T466BI	8.000	1.100	260-1.960	360-2.060	460-2.160	2.260	370	±160	200	4	244	102	322	979
10T466BI	8.000	1.100	260-2.060	360-2.160	460-2.260	2.400	370	±160	200	4	244	102	322	1.014



Qualities:

- For moderately heavy operation - complete program with capacities of up to 10 tons
- Very good residual capacity
- Excellent visibility
- Supplied with welded forks
- Supplied optionally with screw on forks for wear intensive operation (A-version)
- Independent sideshift serially



- 1) 4,8T with capacity (kg/mm) 2.700/1.200 available upon request.
- CofG and weight measurements do not take the cheek plates into account.
- Load backrest see model T479 and T479.1
- Forks see model T180.
- Fork carriage drawings, roller studs and chain anchors to be supplied by customer if necessary.
- Not suitable for clamping between the forks.

Product Images

